


|< 14 5/8" Inch >|

Darling New Toilet wall-mounted for SensoWash® $\& \ \# 254459..92$ / 254459..92



| Dimension | Weight | Order number |
|--|-----------------------|------------------------|
| oWash, led sted* | | |
| | | |
| nic glaze that | | |
| | | |
| 14 5/8" x 24 3/8" Inch | 60.4 lb | 25445992 |
| 14 5/8" x 24 3/8" Inch | 60.4 lb | 25445992 |
| | | |
| Durafix for concealed installation is included, In-wall tank & carrier and actuator plate required for installation / Refer to page XXX, Wall-mounted toilet is ADA compliant, when installed with a seat height of 17" - 19" from the finished floor, * Complies with following standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.14, If 2x4" carrier is used, # 100691 is mandatory for SensoWash® installation | | |
| urface finish will remain clean and attra eleventh digit to the model number. | active-looking for a | long |
| | Wash, led sted* | DWash, led sted* |

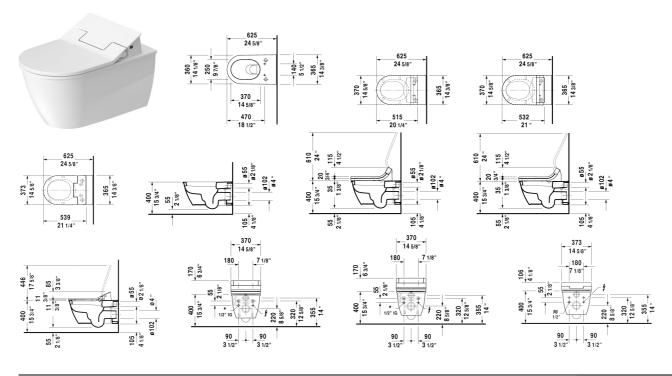

Darling New Toilet wall-mounted for SensoWash® $\& \ \# 254459..92$ / 254459..92

| Geberit in-wall tank and carrier for toilets | 19 3/4" x 3 1/8" Inch | 37.5 lb | 111798 |
|---|-----------------------|---------|--------|
| Connecting set in combination with SensoWash shower-toilet seat, for in-wall carriers H=32 1/4" - 39 3/8", with conduit pipe for connection inside the tank | | | 100730 |
| Connecting set in combination with SensoWash shower-toilet seat | | | 100691 |
| Pre-installation set in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/condiut pipe | | | 005072 |
| Sigma 01 flush plate, dual flush for toilets, White | 9 5/8" x 6 1/2" Inch | | 115770 |
| Geberit in-wall tank and carrier for toilets | 19 3/4" x 5 1/2" Inch | 40.8 lb | 111335 |
| Noise reduction gasket for wall-mounted toilet | | 0.7 lb | 005064 |
| Suitable products SensoWash® Starck C shower-toilet seat for ME by Starck, | | | |
| Starck 2, Starck 3 and Darling New* Rear-, Lady- and Comfortwash, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, heated seat, warm air dryer, power actuated lid and seat, night light, 2 individually programmable user profiles, remote control included, self-cleaning wand, on / off-button, with concealed connections, Quick release: easy seat unit removal and attachment, 14 5/8" x 20 1/4" Inch | | | 610001 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are nonbinding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.