TCL AC

MULTI MATCH SERIES PRODUCTS



REACH EVERY CORNER OF YOUR HOME



FLEXIBLE INSTALLATION

Convertible to floor or under ceiling application allows for design flexibility.



ULTRA-THIN DESIGN

Compact 9.25-inch height design requires minimal space for installation.



80° WIDE RANGE OF AIR FLOW

With our unique louver design, the air flow can be adjusted to provide uniform air distribution.



DUAL DRAINAGE

Condensate drain flexbility allows for left-side or right-side piping.












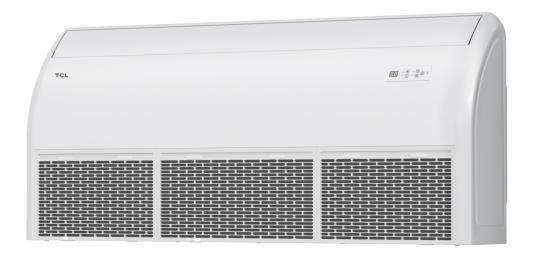

Multi Zone Universal Indoor Unit - Floor Ceiling				
MODEL NUMBER			H18FCHU1XAE	H24FCHU1XAE
System Type			Heat Pump	
SYSTEM PERFORMANCE				
Cooling at 95°F (35°C)	Rated Capacity (Min - Max)	BTU/h	18,000 (4,550 ~ 20,200)	22,000 (6,010 ~ 24,610)
Heating at 47°F (8.3°C)	Rated Capacity (Min - Max)	BTU/h	18,000 (2,910 ~ 22,840)	25,000 (4,750 - 28,640)
ENERGY STAR® Certified		Check Outdoor Unit Match-ups for Energy Star Qualification		
Operation Temperature Range	Cooling	°F (°C)	61 - 88 (16 - 31)	61 ~ 88 (16 ~ 31)
	Heating	°F (°C)	61 ~ 88 (16 ~ 31)	61 ~ 88 (16 ~ 31)
ELECTRICAL				
Power Supply		208-230V / 1Ph / 60Hz (Powered by ODU)		
Connection Wiring AW		AWG	16AWG*4 Stranded, unshielded, TC-ER Type	
Commiunication Protocal Btwn. IDU & ODU		Current Loop		
REFRIGERANT PIPING				
Line Set Sized by IDU (Liquid - Gas)		1/4 - 3/8	1/4 - 3/8	
INDOOR UNIT DATA				
Indoor Motor Type		DC		
Thermostat type		Wireless Remote Controller with Wi-Fi® & Voice Control		
Condensate Drain Size (OD)		in	5/16"	5/16"
Air Flow (Min - Max)		CFM	500 - 1,050	800 ~ 1,200
Sound Pressure Level (Min - Max)		dB(A)	39 - 44	43 ~ 51
External Dimensions (W x H x D) mm		in	33 1/4 × 14 15/16 × 27 1/2	35 13/16 × 16 1/2 × 31 7/16
		mm	845 × 380 × 699	910 × 420 × 800
Package Dimensions (W x H x D) in mm		37 13/16 × 16 15/16 × 29 1/2	40 1/2 × 19 1/16 × 33 7/16	
		960 × 430 × 750	1028 × 485 × 850	
Weight (Net / Gross) Ibs kgs		86 / 93	104.7 / 125.7	
		kgs	39 / 42.2	47.5 / 57
LIMITED WARRANTY		5 Years Parts, 7 Years Compressor Warranty/10 Year Warranty with Registration within 60 days of Installation		