

BT0402N16 SPECIFICATIONS

coco blu·stone™ freestanding bathtub

FEATURES:

- Freestanding, blu·stone™ bathtub
- Streamlined, high profile one piece design
- 65" (1650mm) L x 25½" (650mm) W x 19¾" (500mm) H
- Includes integral slot overflow & matching blu·stone™ waste cover
- Made of blu·stone™ providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Tailpiece not included (Blu recommends BTWaste.RN or BTWasteCI.RN)

SPECIFICATIONS:

Basin Area:	40¼" (1020mm) x 16" (405mm)*
Top Area:	63½" (1615mm) x 24¼" (614mm)*
To Overflow:	2¼" (60mm)*
Slope of Backrest:	65°*
Water Depth:	15¼" (390mm)*
Capacity:	240G (908.4L)*
Weight:	276lbs (125kg)*
Hot water supply req'd:	Should be 70% of water capacity of tub or greater
Warranty:	Five Year Warranty (Residential use) One Year Warranty (Commercial use)
Material:	blu·stone™
Shipping Weight:	386lbs (175kg)*
Shipping Dimensions	(LWH) 71¾" x 36¼" x 32¼" (1823mm x 923mm x 820mm)*

FINISHES:

White Matte as standard
Gloss finish available (Tier 1)

ACCESSORIES (sold separately):




- BTWaste.RN or BTWasteCI.RN Island tub drain for easy installation

INSTALLATION NOTES:

Install this product according to the installation guide.
Floor support under bath must provide for a minimum of 1400 lbs (635kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard
CSA B45.5.11 / IAPMO Z124
- IAPMO / ANSI Z124.8
- CSA

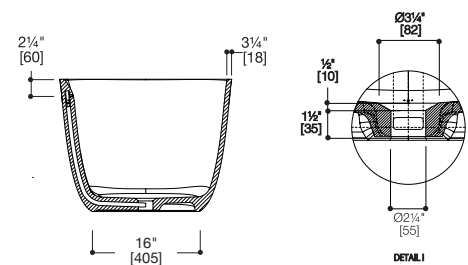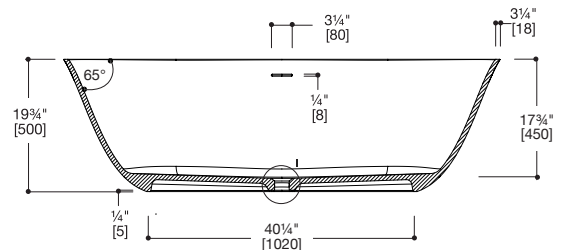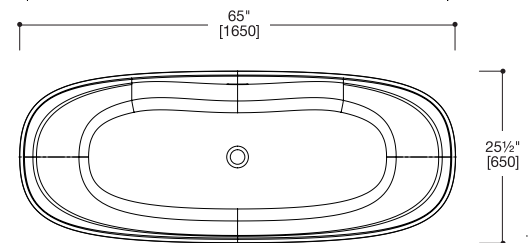

*Approximate measurements for comparison only.

Note: These dimensions and specifications are subject to change without notice.