


TERRAZZO SHOWER FLOOR MONTEREY

- Monterey shower floors are designed for installations where tile walls and glass enclosures are used.
- Precast terrazzo one piece products are made of black and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting.
- The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed. Shower floors are available in custom sizes.
- Flange, cast integral, shall be of galvanized-bonderized steel and shall extend not less than 1" (25mm) high and not less than 1¼" (32mm) wide.
- The drain body in shower floors are made of stainless steel cast integrally and provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe. Removable type stainless steel strainer plate.

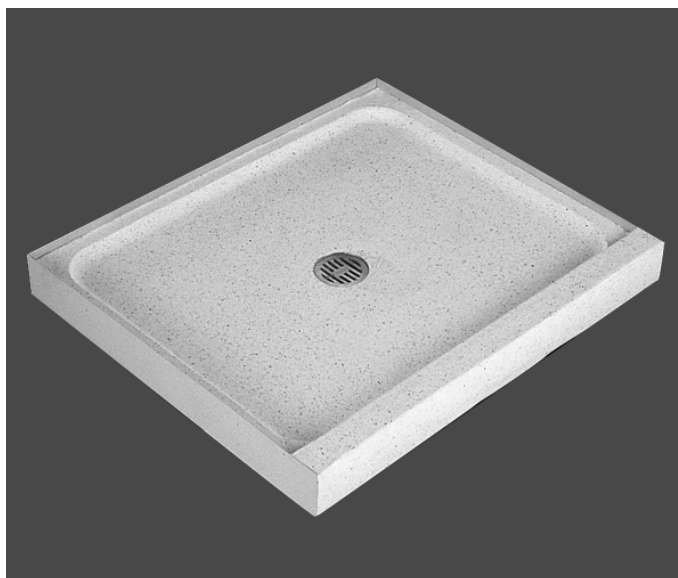


SEE REVERSE FOR ROUGHING-IN DIMENSIONS


IMPORTANT: Rough-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice.

Installations:

- Establish ¼" (6mm) clearance between shower floor and building wall. It is required that the entire area between the shower floor and the building floor has a ½" (13mm) layer of mortar in order that the shower floor is level.
- Optional stainless steel tiling flanges available.

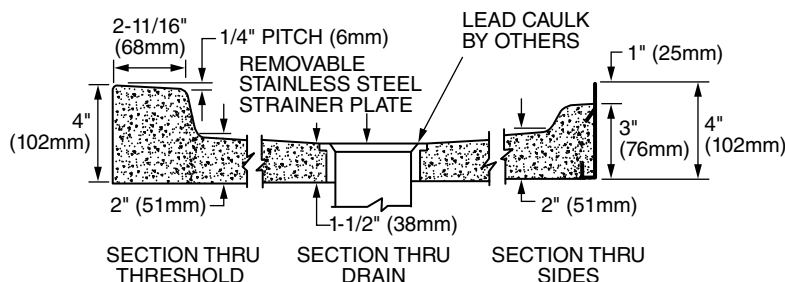

NOTE: Drawing not to scale.

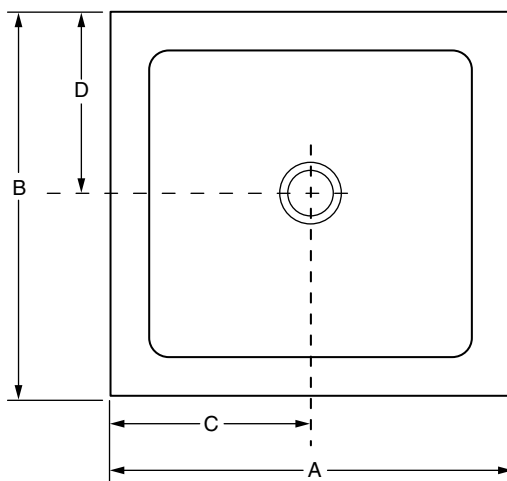

NOTE: Drawing not to scale.

MONTEREY — SINGLE THRESHOLD SQUARE						
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D
30-MFT	30"x 30"	185 lbs / 86 kg	30"(762mm)	30"(762mm)	15"(381mm)	15"(381mm)
32-MFT	32"x 32"	200 lbs / 91 kg	32"(813mm)	32"(813mm)	16"(406mm)	16"(406mm)
34-MFT	34"x 34"	220 lbs / 99 kg	34"(864mm)	34"(864mm)	17"(432mm)	17"(432mm)
36-MFT	36"x 36"	240 lbs / 109 kg	36"(914mm)	36"(914mm)	18"(457mm)	18"(457mm)
40-MFT	40"x 40"	265 lbs / 120 kg	40"(1016mm)	40"(1016mm)	20"(508mm)	20"(508mm)
42-MFT	42"x 42"	295 lbs / 134 kg	42"(1067mm)	42"(1067mm)	21"(533mm)	21"(533mm)
48-MFT	48"x 48"	390 lbs / 177 kg	48"(1219mm)	48"(1219mm)	24"(610mm)	24"(610mm)

MONTEREY — SINGLE THRESHOLD RECTANGLE						
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D
36-MFTR	36"x 32"	240 lbs / 109 kg	36"(914mm)	32"(813mm)	18"(457mm)	16"(406mm)
4232-MFTR	42"x 32"	265 lbs / 120 kg	42"(1067mm)	32"(813mm)	21"(533mm)	16"(406mm)
4234-MFTR	42"x 34"	320 lbs / 145 kg	42"(1067mm)	34"(864mm)	21"(533mm)	17"(432mm)
4236-MFTR	42"x 36"	395 lbs / 179 kg	42"(1067mm)	36"(914mm)	21"(533mm)	18"(457mm)
4832-MFTR	48"x 32"	300 lbs / 136 kg	48"(1219mm)	32"(813mm)	24"(610mm)	16"(406mm)
4834-MFTR	48"x 34"	300 lbs / 177 kg	48"(1219mm)	34"(864mm)	24"(610mm)	17"(432mm)
4836-MFTR	48"x 36"	400 lbs / 181 kg	48"(1219mm)	36"(914mm)	24"(610mm)	18"(457mm)
5432-MFTR	54"x 32"	397 lbs / 180 kg	54"(1372mm)	32"(813mm)	27"(686mm)	16"(406mm)
6030-MFTR	60"x 30"	340 lbs / 154 kg	60"(1524mm)	30"(762mm)	30"(762mm)	15"(381mm)
6032-MFTR	60"x 32"	430 lbs / 195 kg	60"(1524mm)	32"(813mm)	30"(762mm)	16"(406mm)
6034-MFTR	60"x 34"	480 lbs / 218 kg	60"(1524mm)	34"(864mm)	30"(762mm)	17"(432mm)
6036-MFTR	60"x 36"	495 lbs / 225 kg	60"(1524mm)	36"(914mm)	30"(762mm)	18"(457mm)

MONTEREY — SINGLE THRESHOLD (SHORT SIDE) RECTANGLE						
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D
3236-MFTRS	32"x 36"	240 lbs / 109 kg	32"(813mm)	36"(915mm)	16"(406mm)	18"(457mm)
3624-MFTRS	36"x 24"	285 lbs / 129 kg	36"(915mm)	24"(610mm)	18"(457mm)	12"(305mm)
3648-MFTRS	36"x 48"	320 lbs / 145 kg	36"(915mm)	48"(1219mm)	18"(457mm)	24"(610mm)

MONTEREY — DOUBLE THRESHOLD SQUARE						
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D
32-MFTD	32"x 32"	266 lbs / 121 kg	32"(813mm)	32"(813mm)	16"(406mm)	16"(406mm)
36-MFTD	36"x 36"	285 lbs / 193 kg	36"(915mm)	36"(915mm)	18"(457mm)	18"(457mm)
40-MFTD	40"x 40"	320 lbs / 145 kg	40"(1016mm)	40"(1016mm)	20"(508mm)	20"(508mm)