

## RAPID SL

### SLIM 2" X 4" IN-WALL CARRIER AND TANK



**D29010000.000**

#### FEATURES

- Slim tank fits standard 2" x 4" stud walls
- Dual flush - 0.8 gpf and 1.6 gpf (3L and 6L)
- Low noise operation - meets strict European noise (DIN) standards
- No tools required for the installation of the inspection shaft including protection during construction phase, for vertical use
- Self-supporting, pre-assembled powder coated steel frame with quick and lockable adjustments
- ADA Compliant, bowl rim height adjustment from 15" to 19"
- Pneumatic discharge valve offering 3 modes of operation: dual flush, start/stop or single flush
- Tank insulated to prevent condensation
- 2 fixing bolts included, 7" - 9" (180-230 mm) mounting screw distance
- 1/2" water supply connection from top, integrated angle valve
- Actuation plate sold separately
- TÜV approved for load capacity
- 44" (1.13 m) installation height
- CALGreen compliant
- WaterSense® compliant when paired with listed WaterSense high efficiency compatible 0.8-1.28 gpf (3-4.8 lpf) wall hung toilet bowls
- For use with small flush plates 5 1/8" x 6-3/4" (130 x172 mm), please order shaft 40911 000 (sold separately)

#### COLORS/FINISHES

No Finish (000)

#### COMPLIANCE CERTIFICATIONS

Meets or Exceeds ASSE 1002, CSA B45.15, CSA B125.12, ASME A112.6.2, ASME A112.19.5, ASME A112.1002, Massachusetts Plumbing Board Approved.

ROUGH IN DIAGRAM SHOWN  
ON NEXT PAGE




Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for Accessible and Usable Building Facilities-Check Local Codes.



# RAPID SL

## SLIM 2" X 4" IN-WALL CARRIER AND TANK

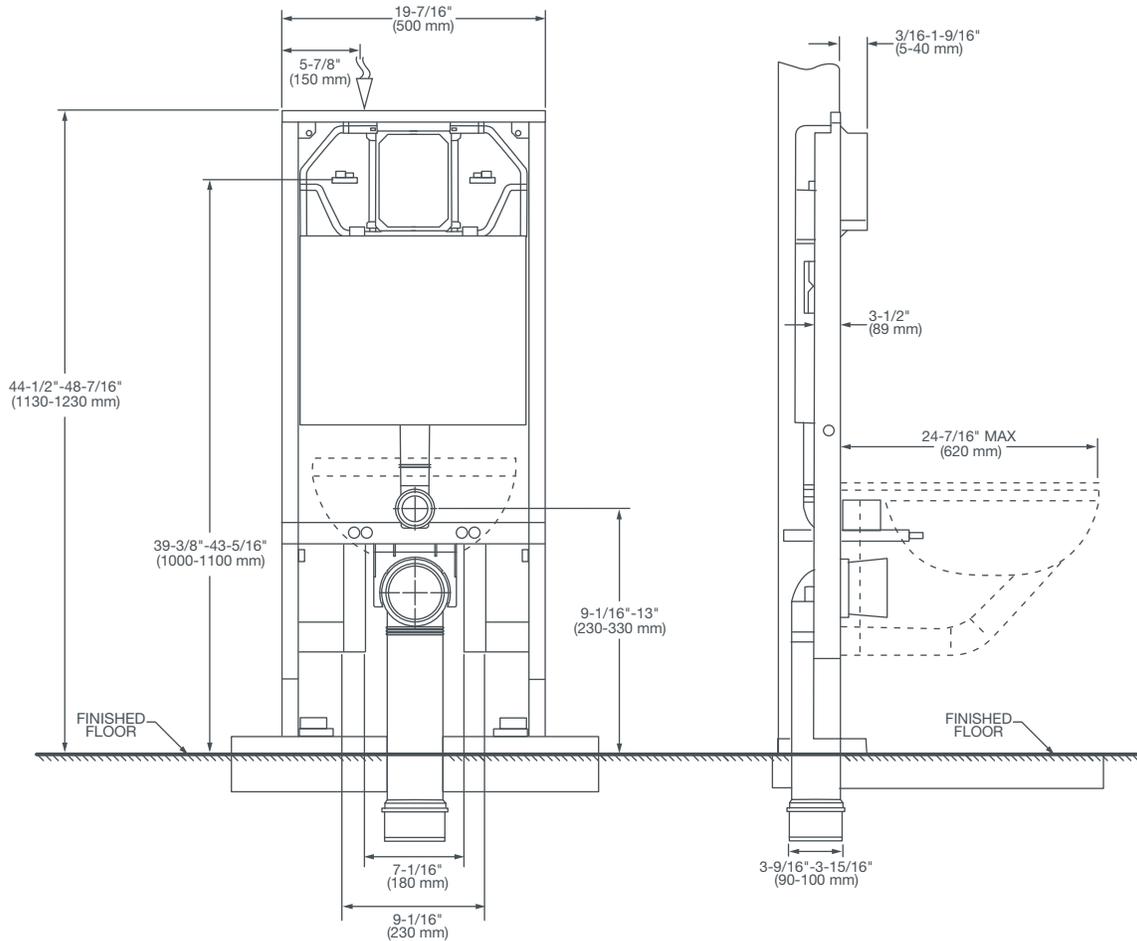

**NOTES:**

Supply not included with fixture and must be ordered separately.

Dimensions shown for location of supply is suggested.

**IMPORTANT:**

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**