





Tub and Shower Faucet Rough-In Valve Assembly

SPECIFICATIONS



Use with trim kits for:



GS-504-S
(G00GS504S)



GS-505-S
(G00GS505S)



GS-507-S
(G00GS507S)



Features/Benefits

- Includes forged valve body, plaster guard and innovative pressure test cap
- Connection Type:
GS-504-S: 1/2" F1807 (crimp) PEX inlets, 1/2" IPS/sweat outlets
GS-505-S: 1/2" IPS/sweat inlets, 1/2" IPS/sweat outlets
GS-507-S: 1/2" F1960 (cold expansion) PEX inlets, 1/2" IPS/sweat outlets
- Includes 1/4 turn service stops
- Installed rough-in can be pressure tested to 150PSI (air or water), mixed or isolated inlets, using included pressure test plug
- Accommodates standard, back-to-back, and thin wall installations
- Integrated, easy-access mounting system
- Treysta cartridge ships with trim, sold separately

Catalog Numbers

- | | |
|----------------------|-----------------------------|
| GS-504-S (G00GS504S) | F1807 inlets with stops |
| GS-505-S (G00GS505S) | IPS/sweat inlets with stops |
| GS-507-S (G00GS507S) | F1960 inlets with stops |

Standards & Certifications

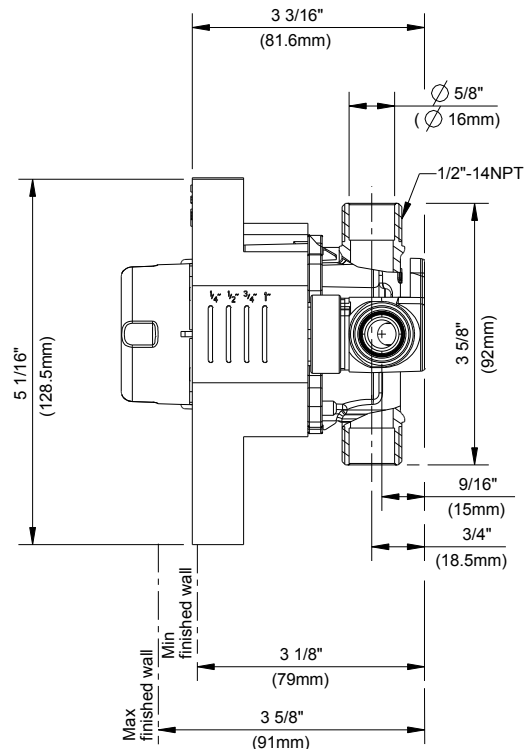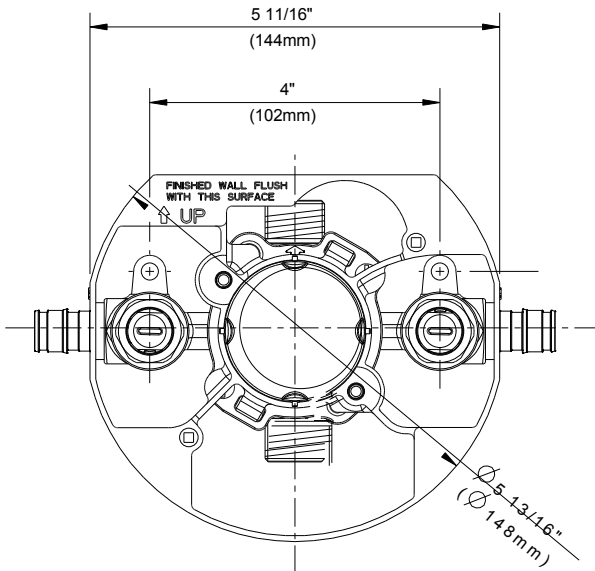

Submittal Information:

Name: _____

Location: _____

Contractor: _____

Contact #: _____