

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fittings adapt PEX tubing to copper pipe.


Technical Data

Material:..... Brass (JIS C-3604)
Operating Temperature:..... 82.2°C / 180°F
Operating Pressure:..... 0.69 MPa / 100 psi

Standards / Listings

Manufactured to B137.5 & F-877

Qty	PEX Size	Sweat Size	Stk. #	Dimension				Weight
A	B	C	D					
1-3/4"	5/8"	1"	15/16"					
(44 mm)	(15.5 mm)	(26 mm)	(24 mm)					
1-3/4"	5/8"	1"	15/16"					
(44 mm)	(15.5 mm)	(26 mm)	(24 mm)					
1-15/16"	11/16"	1-5/16"	1-3/16"					
(49.5 mm)	(16.5 mm)	(33 mm)	(30 mm)					
1-13/16"	11/16"	1-5/16"	1-3/16"					
(45.5 mm)	(16.5 mm)	(33 mm)	(30 mm)					
1-13/16"	11/16"	1-5/16"	1-3/16"					
(45.5 mm)	(16.5 mm)	(33 mm)	(30 mm)					

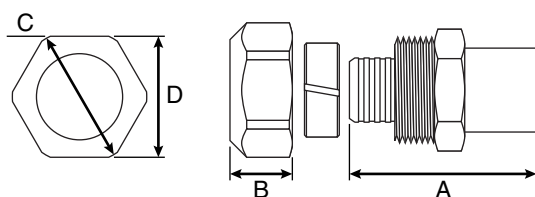

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Heating Warranty

This page is intentionally blank.