


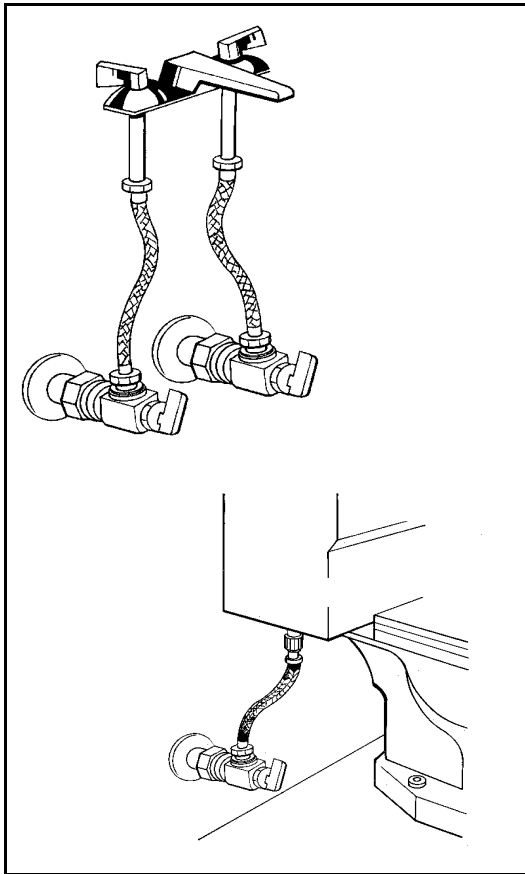

MIGHTYFLEX STAINLESS STEEL CONNECTORS

Specification Sheet

DESIGN FEATURES

- Chloramine resistant soft cone.
- Exclusive POWR-TIGHT 12-point crimp-many times industry standard.
- Chloramine resistant tubing
- Withstands dramatic changes in water pressure
- Easy installation, no special tools required

COMPLIANCES/LISTINGS

- IAPMO Certified
- NSF Compliant
- ASME A112.18.6

MATERIAL SPECIFICATION

- Working Pressure: 160 psi Maximum
- Operating Temperature: 33°F-140°F
- Tubing: Reinforced PVC, NSF 61 Compliant
- Nuts & End fittings - Nickel Plated Brass
- Washers - NSF 61 Compliant



3689 Arrowhead Drive, Carson City, NV 89706
Phone (800) 854-3215 Fax (800) 243-1777
E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

AF/S-2010 (04-08) Rev 4

Product Submittal	
Job Name	
Date	
Part Number	Quantity
Architect	
Contractor	



MIGHTYFLEX STAINLESS STEEL CONNECTORS

Specification Sheet

FAUCET CONNECTORS

PART NUMBER	DESCRIPTION	LENGTH
SFC-109-PP	1/2" FIP Soft Cone x 3/8" Soft Compression	9"
SFC-112-PP		12"
SFC-116-PP		16"
SFC-120-PP		20"
SFC-124-PP		24"
SFC-130-PP		30"
SFC-136-PP		36"
SFC-148-PP		48"
SFC-196-PP		96"
SFC-312-PP	1/2" FIP Soft Cone x 1/2" Compression Soft Cone	12"
SFC-316-PP		16"
SFC-320-PP		20"
SFC-324-PP		24"
SFC-330-PP		30"
SFC-348-PP		48"
SFC-409-PP	1/2" FIP Soft Cone x 1/2" FIP Soft Cone	9"
SFC-412-PP		12"
SFC-416-PP		16"
SFC-420-PP		20"
SFC-424-PP		24"
SFC-430-PP		30"
SFC-436-PP		36"
SFC-448-PP		48"
SFC-506-PP	3/8" Soft Compression x 3/8" Soft Compression	6"
SFC-509-PP		9"
SFC-512-PP		12"
SFC-516-PP		16"
SFC-520-PP		20"
SFC-524-PP		24"
SFC-530-PP		30"
SFC-548-PP		48"
SFC-572-PP		72"
SFF-112-PP	1/2" FIP Soft Cone x 3/8" Flare	12"
SFF-116-PP		16"
SFF-120-PP		20"
SFF-130-PP		30"
SFF-312-PP	1/2" FIP Soft Cone x 1/2" Flare	12"
SFF-316-PP		16"
SFF-320-PP		20"
SFF-330-PP		30"

TOILET CONNECTORS

PART NUMBER	DESCRIPTION	LENGTH
SFT-109-PP	7/8" Soft Cone Ballcock x 3/8" Flare	9"
SFT-112-PP		12"
SFT-116-PP		16"
SFT-120-PP		20"
SFT-309-PP		9"
SFT-312-PP	7/8" Soft Cone Ballcock x 1/2" Flare	12"
SFT-316-PP		16"
SFT-320-PP		20"
SWC-106-PP	7/8" Soft Cone Ballcock x 3/8" Soft Compression	6"
SWC-109-PP		9"
SWC-112-PP		12"
SWC-116-PP		16"
SWC-120-PP		20"
SWC-306-PP	7/8" Soft Cone Ballcock x 1/2" Compression Soft Cone	6"
SWC-309-PP		9"
SWC-312-PP		12"
SWC-316-PP		16"
SWC-320-PP		20"
SWC-406-PP	7/8" Soft Cone Ballcock x 1/2" FIP Soft Cone	6"
SWC-409-PP		9"
SWC-412-PP		12"
SWC-416-PP		16"
SWC-420-PP		20"
SWC-406-PP	7/8" Soft Cone Ballcock x 1/2" FIP Soft Cone	6"
SWC-409-PP		9"
SWC-412-PP		12"
SWC-416-PP		16"
SWC-420-PP		20"
KWC-109-PP	7/8" Soft Cone Ballcock x 3/8" Compression Hard Cone	9"
KWC-112-PP		12"
KWC-116-PP		16"
KWC-120-PP		20"
KWC-309-PP	7/8" Soft Cone Ballcock x 1/2" Compression Hard Cone	9"
KWC-312-PP		12"
KWC-316-PP		16"



3689 Arrowhead Drive, Carson City, NV 89706

Phone (800) 854-3215 Fax (800) 243-1777

E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user responsibility to ensure the most updated revisions are obtained.

AF/S-2010 (04-03) Rev 3