


# Appliance Adaptors


Check adaptor matrix at [www.centrotherm.us.com/Tools/OEM-Approval-Matrix.aspx](http://www.centrotherm.us.com/Tools/OEM-Approval-Matrix.aspx)



## Appliance Adaptor for Coupler Style Flue Collars

Adapts a female PVC / CPVC coupler or appliance flue exhaust to InnoFlue® SW diameters.


| Nominal Diameter<br>PVC to PP | Part      | Overall Length<br><b>A</b> | Effective Length<br><b>B</b> | Max O.D.<br><b>C</b> |
|-------------------------------|-----------|----------------------------|------------------------------|----------------------|
| 2"/2" (60/60)                 | ISAGLO202 | 3.3 (83)                   | 1.0 (26)                     | 3.0 (76)             |
| 3"/3" (89/80)                 | ISAGLO303 | 3.0 (75)                   | 0.8 (21)                     | 3.8 (97)             |
| 4"/4" (114/110)               | ISAGLO404 | 3.4 (87)                   | 0.8 (21)                     | 5.1 (129)            |

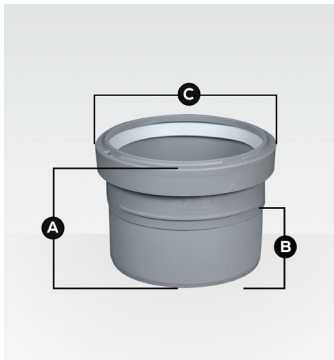

## Appliance Adaptor for Flue Collar with Hose Clamp

Adapts a female PVC / CPVC sized appliance collar (with integrated gasket) to InnoFlue® SW diameters.


| Nominal Diameter<br>PVC to PP | Part      | Overall Length<br><b>A</b> | Effective Length<br><b>B</b> | Max O.D.<br><b>C</b> |
|-------------------------------|-----------|----------------------------|------------------------------|----------------------|
| 2"/2" (60/60)                 | ISAALO202 | 3.3 (83)                   | 1.0 (26)                     | 3.0 (76)             |
| 3"/3" (89/80)                 | ISAALO303 | 3.0 (75)                   | 0.8 (21)                     | 3.8 (97)             |
| 4"/4" (114/110)               | ISAALO404 | 3.4 (87)                   | 0.8 (21)                     | 5.1 (129)            |



## Appliance Adaptor Tapered SS to InnoFlue®

Adapts a tapered female stainless steel appliance flue exhaust with tabs to InnoFlue®.

| Nominal Diameter | Part      | Overall Length<br><b>A</b> | Effective Length<br><b>B</b> | Max O.D.<br><b>C</b> |
|------------------|-----------|----------------------------|------------------------------|----------------------|
| 3" (80)          | ISAAS0303 | 4.5 (115)                  | 0.8 (21)                     | 3.8 (97)             |
| 4" (110)         | ISAAS0404 | 4.8 (122)                  | 0.8 (21)                     | 5.1 (129)            |



## Appliance Adaptor Straight SS to InnoFlue®

Adapts a stainless steel appliance flue exhaust with gasket and clamp to InnoFlue®.

| Nominal Diameter | Part     | Overall Length<br><b>A</b> | Effective Length<br><b>B</b> | Max O.D.<br><b>C</b> |
|------------------|----------|----------------------------|------------------------------|----------------------|
| 3"/3" (76/80)    | ISSA0303 | 6.0 (153)                  | 3.1 (78)                     | 3.8 (97)             |
| 4"/4" (102/110)  | ISSA0404 | 6.0 (153)                  | 3.6 (91)                     | 5.1 (129)            |