



4700 W. 160th St.  
Cleveland, OH 44135  
PH: 800-321-9532  
FX: 800-321-9535  
www.oatey.com


**TECHNICAL SPECIFICATION**

**RETRO MASTER FLASH ROOF FLASHINGS**



**Engineering Specification:** Oatey Retro Master Flash Roof Flashings are designed to seal around roofing systems at any pitch. The Retro Master Flash is unique in that it has a tear out collar that makes the flashing accommodate a broad range of pipe diameter. Made from EPDM, these flashings are rated at 212 F continuous heat, and are approved for Type B installations.

**Job Reference**

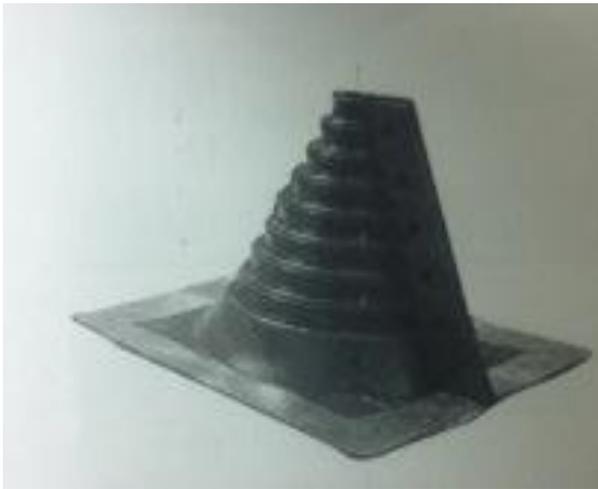

(All dimensions in inches)

- ◆ Retro Master Flashing slides over vent pipe for pitch to 45°
- ◆ Flexible base conforms to most flat or contoured roof surfaces including clay tile and metal roofs
- ◆ Approved for Type B installations
- ◆ Master Boot is made of EPDM and compounded specifically for maximum resistance to weathering due to ozone and ultraviolet
- ◆ Master Boot is easily customized with a sharp knife or scissors to accommodate a broad range of pipes and vent diameters.
- ◆ Continuous Temperature Resistance to 212° F. Intermittent Temperature Resistance to 275° F
- ◆ Do not use petroleum based products on Retro Master Roof Flashings

✓	Product No.	Description	Length Base (L)	Width Base (W)	PACK
	14751	1/2" - 4" Retro Master Roof Flashing	8	8	10
	14752	4" - 9-1/4" Retro Master Roof Flashing	8	8	5
	14753	9-1/4" - 16" Retro Master Roof Flashing	8	8	5
	14049	1/4" - 4" Retro Master Roof Flashing	8	8	1



IAPMO Listed



653

Data is subject to manufacturing tolerances.