



SuperStor Stainless Steel Storage Tank Submittal

JOB NAME:

LOCATION:

ARCH./ENGR.:

WHOLESALER:

MECH. CONTRACTOR:

MODEL NUMBER:

NOTES:


Stainless Steel Tank

- Tank constructed of type 316L stainless steel for tolerance of high temperatures and superior corrosion resistance
- Insulated with approximately 2" of environmentally safe, CFC free, water-blown, extra thick foam insulation
- Allows less than ½ degree Fahrenheit per hour heat loss
- Outer shell constructed of silver finished durable plastic for rust and impact resistance
- NPT stainless steel inlet and outlet domestic connections for all models – side tappings
- Temperature and pressure relief valve port
- Stainless steel control well for accurate current temperature measurement inside vessel
- ¾", 1", and 1 ½" NPT connection sizes


Additional Features

- Surface Mount Control or Well Inserted Aquastat for Accurate Temperature Control
- Limited Ten (10) Year Residential and Commercial Warranty coverage
- ETL Listed
- NSF Listed Components
- Lead Free Compliant, as required by the Safe Drinking Water Act, Section 1417


LP-32-C
09/21/2021

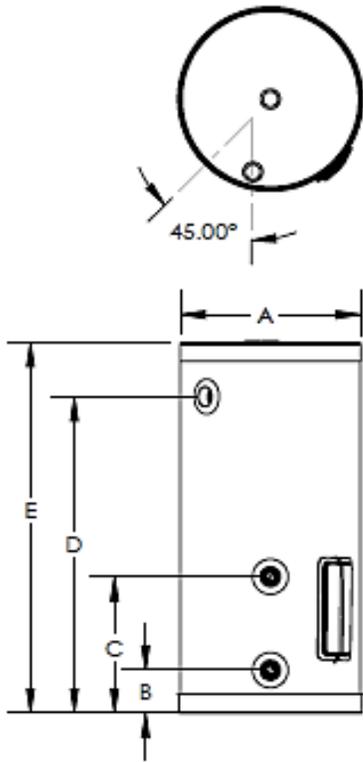

20/30/45 GALLON

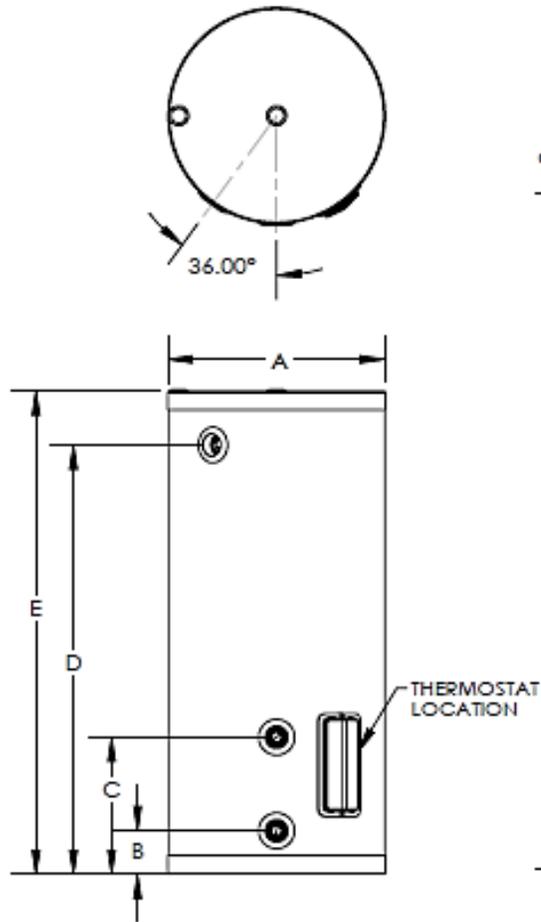

60 GALLON

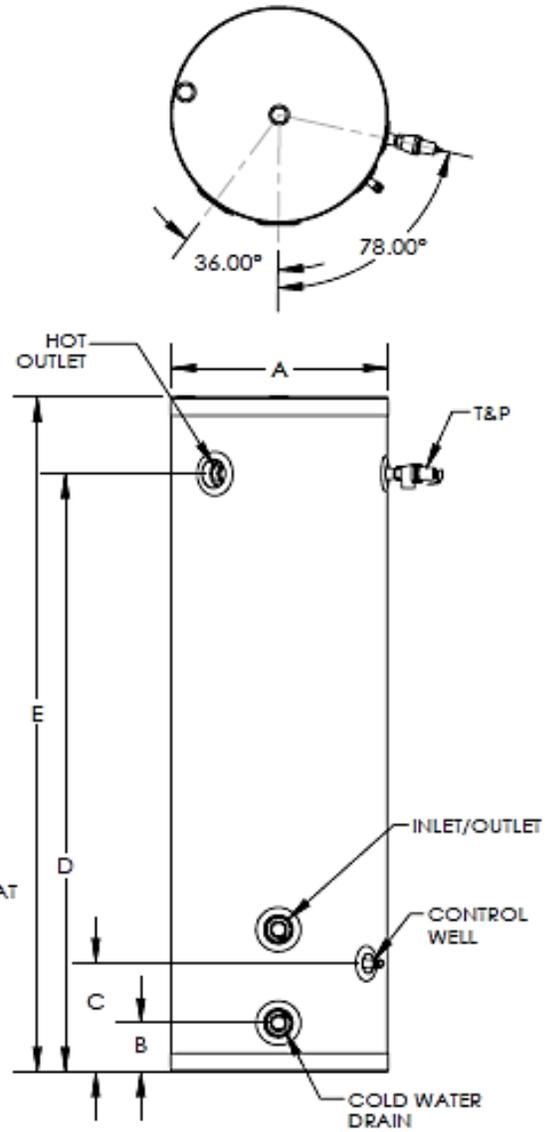

80/119 GALLON

MODEL	DIMENSIONS					TEST PRESSURE	WORKING PRESSURE	WEIGHT (LBS)	CONNECTION SIZES
	A	B	C	D	E				
SSU-20CB	19-1/4"	4-1/2"	14-1/2"	21-3/4"	27-1/2"	300 PSI	150 PSI	25	3/4" NPT
SSU-30CB	19-1/4"	4-1/2"	14-1/2"	33-3/4"	39-1/2"			40	
SSU-45CB	19-1/4"	4-1/2"	14-1/2"	45-3/4"	59-1/2"			64	
SSU-60CB	23-1/4"	4-1/2"	14-1/2"	45-3/4"	52-1/2"			90	
SSU-80CB	23-1/4"	6"	16"	64-3/4"	72"			129	1-1/2" NPT
SSU-119CB	27"	7-1/4"	17-1/4"	66"	73-1/2"	178			