



## Power Gas Water Heaters

■ Five-Year Limited Tank/Heat Exchanger Warranty  
– THE INDUSTRY'S FINEST

- 140,100 to 623,000 BTU/hr
- 50 to 113 gallon capacities
- Glass-fused-to-steel water tank
- Dual magnesium anode rods to inhibit corrosion
- Barometric draft control furnished with all models
- Propane gas available on request
- Power gas burner with spark ignition, 100% safety shut-off

### Turboflue® High Performance Heat Exchanger:


- Patented helical-fin multi-stage design
- Superior heat conduction and fuel efficiency

**Made in the USA**



**POWER GAS**  
• **WATER HEATERS** •

*WE TAKE WATER HEATERS PERSONALLY*

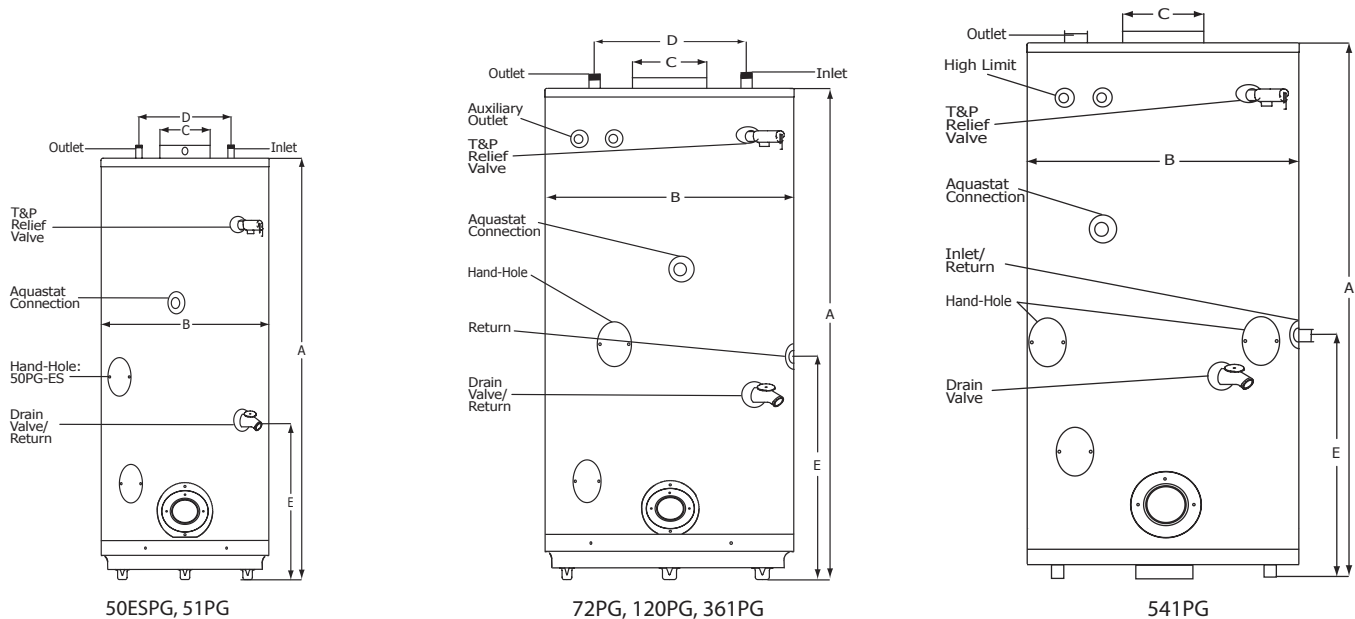

| Model  | Storage<br>GAL (L) | Rated Input<br>BTU/HR<br>(kW) | Recovery<br>@ Δ 90°F<br>(32° C)<br>GAL/HR<br>(L/HR) | Max. Temp<br>Setting °F<br>(°C) | Inlet<br>Pipe Dia.<br>NPT | Outlet<br>Pipe Dia.<br>NPT | Return<br>Pipe Dia.<br>NPT | Dimensions in Inches (cm) |                  |                  |                  |                  | Shipping Weight<br>LBS (kg) |                   |
|--------|--------------------|-------------------------------|-----------------------------------------------------|---------------------------------|---------------------------|----------------------------|----------------------------|---------------------------|------------------|------------------|------------------|------------------|-----------------------------|-------------------|
|        |                    |                               |                                                     |                                 |                           |                            |                            | A                         | B                | C                | D                | E                | Standard                    | ASME              |
| 50ESPG | 50<br>(189.27)     | 140,100<br>(41.03)            | 142<br>(537.53)                                     | 160**<br>(71.11)                | 1.00                      | 1.50                       | 1.50                       | 52.00<br>(132.08)         | 26.00<br>(66.04) | 6.00<br>(15.24)  | 13.50<br>(34.29) | 18.50<br>(46.99) | 305<br>(138.35)             | N/A               |
| 51PG   | 50<br>(189.27)     | 152,000<br>(44.55)            | 159<br>(601.88)                                     | 160**<br>(71.11)                | 1.00                      | 1.00                       | .75                        | 59.00<br>(149.86)         | 24.00<br>(60.96) | 6.00<br>(15.24)  | 11.00<br>(27.94) | 18.00<br>(45.72) | 305<br>(138.35)             | N/A               |
| 72PG   | 67<br>(253.62)     | 199,000<br>(58.32)            | 204<br>(772.22)                                     | 160**<br>(71.11)                | 1.50                      | 1.50*                      | 1.50*                      | 58.00<br>(147.33)         | 28.00<br>(71.12) | 8.00<br>(20.32)  | 16.00<br>(40.64) | N/A              | 520<br>(235.87)             | N/A               |
| 120PG  | 113<br>(427.75)    | 155,000<br>(45.43)            | 160<br>(605.67)                                     | 180<br>(82.22)                  | 1.00                      | 2.00                       | 2.00                       | 67.00<br>(170.18)         | 32.00<br>(81.28) | 6.00<br>(15.24)  | 19.00<br>(48.26) | 22.00<br>(55.88) | 660<br>(299.37)             | N/A               |
| 361PG  | 91<br>(344.47)     | 385,000<br>(112.83)           | 435<br>(1,646.65)                                   | 180<br>(82.22)                  | 1.00                      | 2.00                       | 2.00                       | 67.00<br>(170.18)         | 32.00<br>(81.28) | 9.00<br>(22.86)  | 23.00<br>(58.42) | 26.00<br>(66.04) | 1,065<br>(483.08)           | N/A               |
| 541PG  | 83<br>(314.19)     | 623,000<br>(182.58)           | 627<br>(2,373.45)                                   | 180<br>(82.22)                  | 2.00                      | 2.00                       | 2.00                       | 66.00<br>(167.64)         | 34.00<br>(86.36) | 10.00<br>(25.40) | N/A              | 30.50<br>(77.47) | 1,290<br>(585.13)           | 1,310<br>(594.21) |

No field conversion kits available.

Burner protrudes 12" - 14" from tank depending on make and model. Contact Bock for burner detail dimensions.

\*Nipple not included

\*\*Optional setting, contact factory

T&P valve and brass drain valve factory installed

Standard Voltage (all): 120V, 60 Hz, 1P

Working Pressure: 150 psi (1034 kPa); Test Pressure: 300 psi (2068 kPa)

All Bock products meet or exceed current ASHRAE standards.

**Warning:** Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

www.bockwaterheaters.com

110 South Dickinson Street Madison, Wisconsin 53703

Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304

