



Wall-Hung Vanity Installation Sheet

Dickson


Please Rear: If the wall where the vanity will be hung is hollow, it is imperative to use a horizontal reinforcement beam that must span across at least two of the vertical studs for proper support.

Any vanity hung on hollow wall without above specified reinforcement beam will render any warranties void

Please assemble the provided mounting platform and use to ensure that cabinet will not fall or slip during installation.



The provided mounting platform will assure the top of the vanity is standard 34" from the ground (add proper fillers if additional height is preferred).

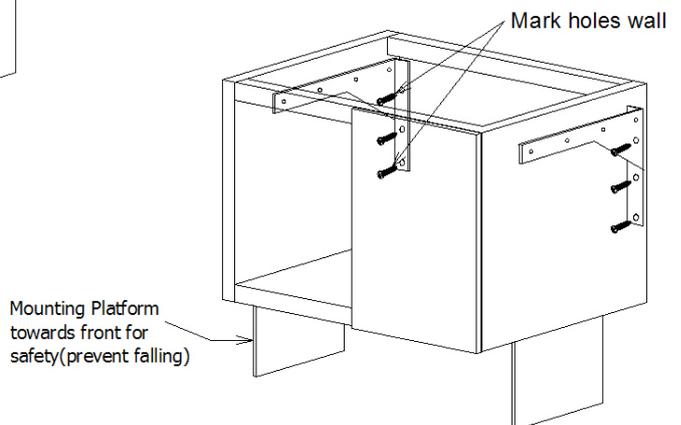

Install all 3 screws on each side of the mounting brackets securely on the wall before removing the mounting platform.

