



## Rough for wall-mounted faucet flexible positioning -

---

35 720 970 Product version from 4/1/2022




- brass, lead free
- 1/2" connection
- 3x plug 1/2"
- 3x Mud guard

NOTE: Important for certain series! Due to minimum rough-in requirements, a framing of 2x6 studs may be needed.



Rough for wall-mounted faucet flexible positioning -

35 720 970    Product version from 4/1/2022

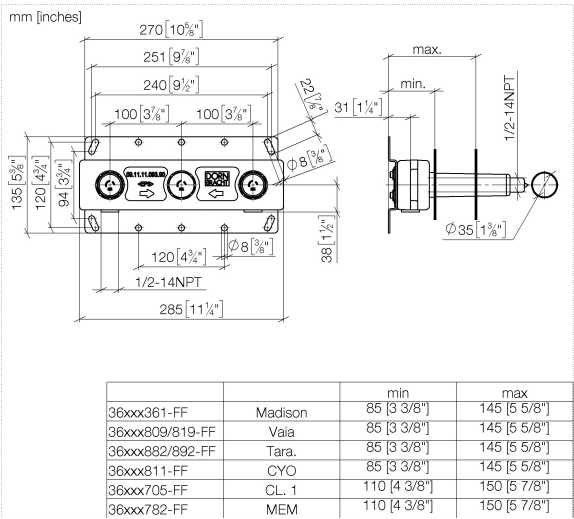

Codes & Standards


ASME A112.18.1    cUPC    NSF372    NSF61

Certificates

IAPMO\_N-4976    IAPMO\_6397    IAPMO\_4976 (

## Rough for wall-mounted faucet flexible positioning -

35 720 970 Product version from 4/1/2022

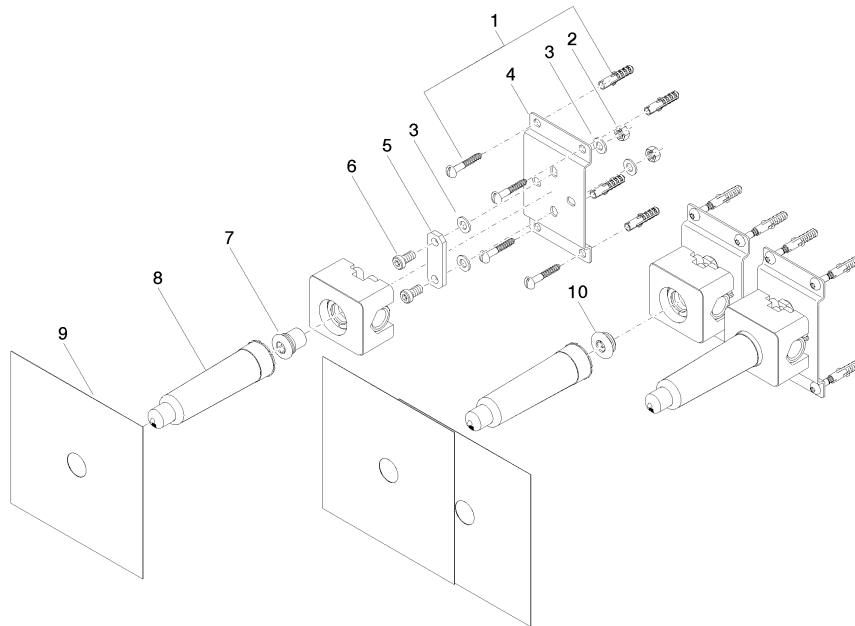

### Spare parts list

| Number | Item Number        | Designation | Number of units | Lead time |
|--------|--------------------|-------------|-----------------|-----------|
| 1      | 04 30 31 024 01 90 | fixing set  | 6               | 2         |
| 2      | 09 23 10 023 90    | nut         | 6               | 2         |
| 3      | 09 30 11 139 90    | disc        | 12              | 2         |
| 4      | 09 17 20 104 90    | holder      | 3               | 2         |
| 5      | 09 30 11 137 90    | disc        | 3               | 60        |
| 6      | 09 30 30 068 90    | screw       | 6               | 2         |
| 7      | 04 31 20 037 00 90 | plug        | 1               | 2         |
| 8      | 04 21 02 173 01 90 | cap         | 3               | 2         |
| 9      | 04 14 03 072 01 90 | gasket kit  | 3               | 2         |
| 10     | 04 31 20 006 00 90 | plug        | 2               | 2         |