

DW16000

- DW16000

Polished Chrome
- DW16080

Satin Nickel
- NEW

Available Spring 2019
- DW16020

Matte Black
- DW16022

Shiny Black
- DW16040

Gun Metal
- DW16061

Copper
- DW16065

Bronze
- DW16070


Polished Nickel
- DW16090

Satin Brass



FEATURES
AND BENEFITS

The Little Butler® Cold Filtered
Flow Rate: 0.5
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: ¾" Ceramic
Countertop Hole Diameter: 1 ¼"
Weight: 3 lbs.



LB16100

- LB16100

Polished Chrome
- LB16180

Satin Nickel
- NEW

Available Spring 2019
- LB16120

Matte Black
- LB16122

Shiny Black
- LB16140

Gun Metal
- LB16161

Copper
- LB16165

Bronze
- LB16170


Polished Nickel
- LB16190

Satin Brass



FEATURES
AND BENEFITS

The Little Butler® Hot Filtered
Flow Rate: 0.5
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: ¾" Ceramic
Countertop Hole Diameter: 1 ¼"
Weight: 3 lbs.



LB16200

- LB16200

Polished Chrome
- LB16280

Satin Nickel
- NEW

Available Spring 2019
- LB16220

Matte Black
- LB16222

Shiny Black
- LB16240

Gun Metal
- LB16261

Copper
- LB16265

Bronze
- LB16270


Polished Nickel
- LB16290

Satin Brass



FEATURES
AND BENEFITS

The Little Butler® Hot/Cold Filtered
Flow Rate: 0.5
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: ¾" Ceramic
Countertop Hole Diameter: 1 ¼"
Weight: 3 lbs.



Indicates:  Cold  Hot  Hot/Cold

Faucet supply lines are U.S. standard ¾" O.D. All faucets can accommodate at least 1 ¼" countertop thickness. Several can accommodate up to 3". Call for additional thickness.



Pictured: FFPD5550 faucet

PEAK

The sleek and chic Peak faucet can complement any sink style. A **pull-down spray** extends this faucet's use in prep, cooking or cleanup then fits back neatly into an intuitive, **angled dock**. You'll love the understated styling of this semi-pro faucet and rave over the simplicity of use.



NEW FFPD5550


Available Spring 2019

FFPD5550 Stainless Steel



FEATURES
AND BENEFITS

1-Hole Semi-Pro
Flow Rate: 1.75 gpm
Spray Type: Full
Spout Swivel Range: 360°
Cartridge: 35mm Ceramic
Check Valve: Integrated Double
Countertop Hole Diameter: 1 ¾"
Weight: 8 lbs.



Faucet supply lines are U.S. standard ¾" O.D. All faucets can accommodate at least 1 ¼" countertop thickness. Several can accommodate up to 3". Call for additional thickness.


FARM HOUSE
DW12000

- DW12000 Polished Chrome
- DW12080 Satin Nickel



FEATURES
AND BENEFITS

The Little Butler® Cold Filtered
Flow Rate: 0.5 gpm
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: 3/8" Ceramic
Countertop Hole Diameter: 1 1/4"
Weight: 2 lbs.




FARM HOUSE
LB12100

- LB12100 Polished Chrome
- LB12180 Satin Nickel



FEATURES
AND BENEFITS

The Little Butler® Hot Filtered
Flow Rate: 0.5 gpm
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: 3/8" Ceramic
Countertop Hole Diameter: 1 1/4"
Weight: 3 lbs.




FARM HOUSE
LB12200

- LB12200 Polished Chrome
- LB12280 Satin Nickel



FEATURES
AND BENEFITS

The Little Butler®
Hot/Cold Filtered
Flow Rate: 0.5 gpm
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: 3/8" Ceramic
Countertop Hole Diameter: 1 1/4"
Weight: 4 lbs.



Indicates: Cold Hot Hot/Cold


LOGIK
DW9000C

- DW9000C Polished Chrome
- DW9070C Polished Nickel
- DW9080C Satin Nickel



FEATURES
AND BENEFITS

The Little Butler®
Cold Filtered
Flow Rate: 0.5 gpm
Spray Function: Stream
Spout Swivel Range: 360°
Cartridge: 3/8" Ceramic
Countertop Hole Diameter: 1 3/8"
Weight: 3 lbs.



LOGIK VALUE OFFER
DW9000C-100

- DW9000C-100 Polished Chrome
- DW9080C-100 Satin Nickel



Includes: DW9000C Little Butler® cold water faucet with FRCNSTR100 filtration canister and FM100 filter monitoring device.
Weight: 7 lbs.


LOGIK
LB9100C

- LB9100C Polished Chrome
- LB9170C Polished Nickel
- LB9180C Satin Nickel




FEATURES
AND BENEFITS

The Little Butler® Hot Filtered
Flow Rate: 0.5 gpm
Spray Type: Stream
Spout Swivel Range: 360°
Cartridge: 3/8" Ceramic
Countertop Hole Diameter: 1 3/8"
Weight: 3 lbs.



LOGIK VALUE OFFER
LB9100C-110-HT

- LB9100C-110-HT Polished Chrome
- LB9180C-110-HT Satin Nickel

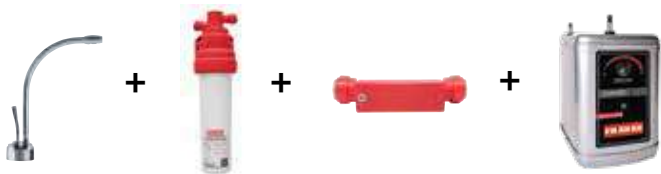

Includes: LB9100C Little Butler® hot water faucet with FRCNSTR110 filtration canister, FM100 filter monitoring device and the HT300 Little Butler Heating Tank.
Weight: 16 lbs.

Indicates: Cold Hot Hot/Cold

All faucets can accommodate at least 1-3/4" countertop thickness. Several can accommodate up to 3". Call for additional thicknesses. Recommended Pressure Range: 15-75 PSI. All Franke filtration faucets have been certified to comply with NSF61 and NSF372 drinking water system component requirements. These requirements meet California Health and Safety Code requirements for low lead (AB1953) as well as the low lead requirements of the US Safe Drinking Water Act. Franke faucets also meet the water efficiency requirements of the California Energy Commission and the US Department of Energy.

All faucets can accommodate at least 1-3/4" countertop thickness. Several can accommodate up to 3". Call for additional thicknesses. Recommended Pressure Range: 15-75 PSI. All Franke filtration faucets have been certified to comply with NSF61 and NSF372 drinking water system component requirements. These requirements meet California Health and Safety Code requirements for low lead (AB1953) as well as the low lead requirements of the US Safe Drinking Water Act. Franke faucets also meet the water efficiency requirements of the California Energy Commission and the US Department of Energy.