

Geberit Installation System for Wall-Hung Urinals

Product Specifications

In-Wall Duofix concealed carrier system with actuator flush panel for residential 2-hole wall-hung urinals. System shall fit within 3" (75 mm) framing wall or plumbing chase. Framing members should provide support similar to 2" x 6" (51 mm x 152 mm) wood construction or steel framing members placed 19 3/4" (500 mm) apart. Water supply shall have flow diameter no smaller than 1/2" (13 mm) copper tube, and a minimum flow pressure of 35 PSI (0.24 MPa). The urinal shall be a third party listed maximum 0.5 GPF (1.9 LPF) 2-hole wall-hung type. The carrier frame shall be adjustable. Actuator flush panels shall be die-cast zinc, molded plastic or fabricated stainless steel and plated to preserve material integrity. All components shall be compliant with applicable codes and product standards.

Warranty

Limited lifetime warranty on flush valve and carrier. One-year warranty on actuator flush plates.

Features


- Water consumption - 0.5 GPF (1.9 LPF)
- 16-gauge, powder-coated, structural-steel tubing rated to 110 lbs (50 kg) without damage to finished wall or carrier unit
- 44 1/8" (1119 mm) frame height depending on urinal
- Installation hardware included

Complies with the latest editions of:

- ASME: A112.6.2
- ASSE 1037
- CSA B125.3

Products marked with comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.

Model No.	Description
111.625.00.1	Geberit Duofix Carrier for wall-hung urinals

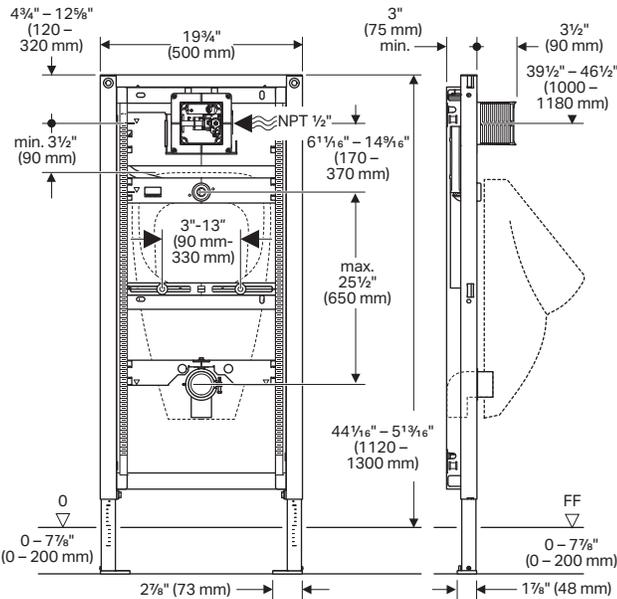

ARCHITECT/ENGINEER APPROVAL

Job Name _____

Date _____ Quantity _____

Model Specified _____

Variations Specified _____

Customer/Wholesaler _____

Contractor _____

Architect _____

Geberit
 2100 S. Clearwater Drive
 Des Plaines, IL 60018
 USA

P 800-566-2100
 F 847-803-5454