## Purist™

# **KOHLER** Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-14410-4

#### **Features**

- Metal construction
- Lever handles
- 5" (127 mm) spout reach
- Pop-up drain with lift rod and tailpiece
- Reversible quarter-turn washerless ceramic disc valves
- Lower flow aerator options are available
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)

#### Material

- Brass valve bodies
- KOHLER finishes resist corrosion and tarnishing

#### Installation

For 8" - 16" (203 - 406 mm) centers

#### **Recommended Products/Accessories**

K-23726 Drain treatment

K-14375 24" Double Towel Bar

K-14377 Pivoting toilet paper holder

K-14435 18" Towel Bar

K-14436 24" Towel Bar

K-14441 Towel Ring

K-14443 Robe Hook

K-14444 Vertical toilet paper holder





#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense™

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

**CSA B651** 

OBC

### **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.

#### Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant™ Polished Nickel
	AF	Vibrant™ French Gold
	BN	Vibrant™ Brushed Nickel
	BV	Vibrant™ Brushed Bronze



# **Faucets** Widespread bathroom sink faucet with Lever handles,

1.2 gpm **K-14410-4** 

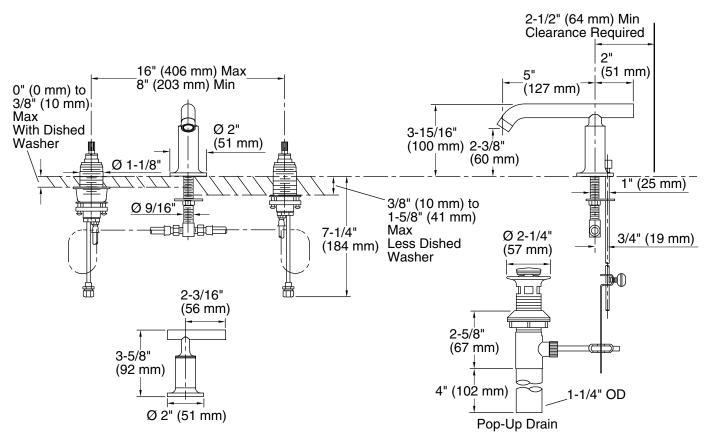

#### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 5" (127 mm)

#### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

