

Persuade® Curv

Two-piece elongated toilet with skirted trapway, dualflush

K-75790

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand nested trip lever offers a choice of 1.0 or 1.6 gallons per flush (gpf)
- Skirted trapway simplifies cleaning
- Combination consists of the K-4326 bowl and the K-19042 tank
- Dual-flush technology allows you to choose between a full or partial flush
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- Standard 12" (305 mm) rough-in only. Cannot be combined with K-5383, or K-5381 for use in 10" or 14" installations



- Standard 12" (305 mm) rough-in
- Seat sold separately
- Requires mounting plate 1362736 for heated seat installation

Water Conservation & Rebates

- Eligible for consumer rebates in some municipalities
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

Recommended Products/Accessories

K-5588 Purefresh® Deodorizing elongated toilet seat K-4008 Reveal® Quiet-Close™ elongated toilet seat K-9237 Dual-flush Trip Lever 1265114 Connector Hose

Included Components

K-23726 Drain treatment

K-4326 Elongated toilet bowl with skirted trapway K-19042 Toilet tank, dual-flush





Codes/Standards

ASME A112.19.14
ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
4214	7	Black Black™




KOHLER

Persuade® Curv

Two-piece elongated toilet with skirted trapway, dualflush

K-75790

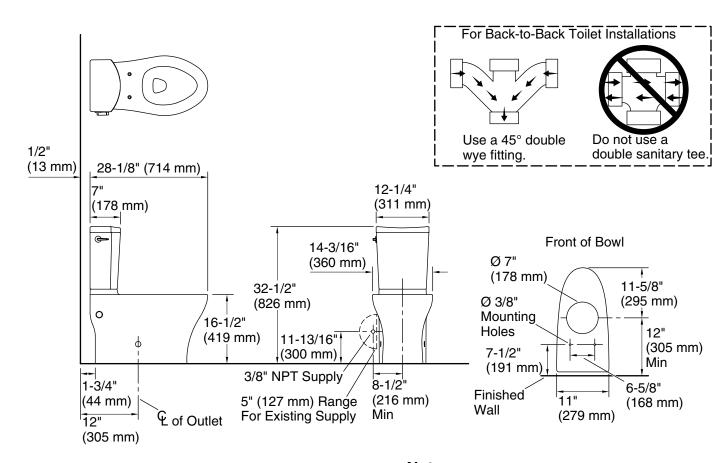

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor Bowl shape: Elongated Flush type: Class Five Trap passageway: 2-5/16" (58 mm)

Water surface size: 4-1/2" x 5-3/4" (114 mm x 146 mm)

Rim to water 8-1/2" (216 mm)

surface:

12" (305 mm) Rough-in: Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

IMPORTANT! The rough-in must be 12# (305 mm) or more from the base of the wall or baseboard. Install or relocate the supply and outlet as necessary to conform to rough-in dimensions.

If this toilet is installed in new construction, install a new supply stop following the dimensions in the diagram.

In installations with the supply stop installed, the existing supply stop may need to be relocated if it is less than 8-1/2# (216 mm) from the centerline of the toilet. Dry fit the toilet to confirm if the supply stop needs to be relocated.

The supplied hose will extend roughly 6# (152 mm) from the toilet. If the supplied hose does not reach the supply stop, a longer supply hose may be used.

