

INDIRECT WATER HEATERS

4 MODELS: CAPACITIES FROM 40-119 GALLONS

GLASS LINED STEEL COIL AND TANK

FULLY WELDED CONSTRUCTION

DENT RESISTANT JACKET

6 YEAR LIMITED WARRANTY





GLASS LINED INDIRECT WATER HEATERS

NO ONE BRINGS IT ALL TOGETHER LIKE LOCHINVAR

Lochinvar is the industry leader that other leading companies call upon for the most advanced and efficient water heating products in the world. For that reason, Lochinvar is trusted to go beyond the call of duty to find a solution for every project, no matter the size. You will not find a water heating company that works harder or cares more.

That’s why no one brings it all together quite like Lochinvar.

GLASS LINED INDIRECT GIT MODELS DIMENSIONS AND SPECIFICATIONS

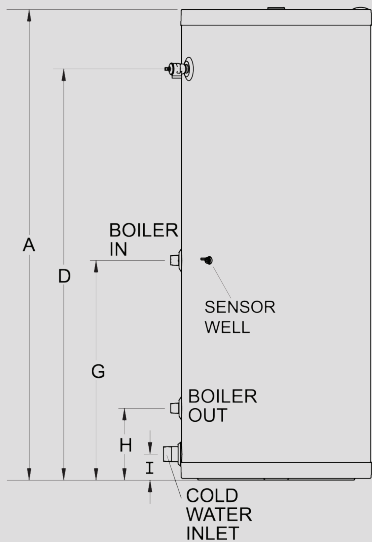

The “Hot Water Outlet” connection is Female NPT.
All other connections are Male NPT.

Model Number	A	B	D	G	H	I	Hydronic Coil Conn. Size	Domestic Water Conn. Size Inlet	Domestic Water Conn. Size Outlet	Ship. Wt. (lbs.)
GIT040	40"	23-2/3"	30"	21-2/3"	9-1/4"	3-3/4"	1"	1"	1-1/4"	165
GIT050	48"	23-2/3"	38-3/4"	27-1/3"	9-1/4"	3-3/4"	1"	1"	1-1/4"	200
GIT080	63-1/2"	23-2/3"	54-1/2"	32"	9-1/4"	2-3/4"	1"	1-1/2"	1-1/2"	250
GIT119	63-3/4"	29-1/2"	53-1/3"	33"	9-1/4"	3-1/2"	1"	1-1/2"	1-1/2"	320

Model Number	Potable Water Volume (Gallons)	Standby Loss (°F/Hr)	First Draw Gals.	Continuous Draw (GPH)	1st Hour Rating (GPH)	HEAT SOURCE			
						Coil Volume (Gallons)	Min Coil Load (Btu/Hr)	Min Flow (GPM)	Friction Loss (Ft. Hd.)
GIT040	42.0	1.8	39	157	196	2.5	99,000	14.0	1.9
GIT050	44.0	1.8	42	202	244	3.4	125,000	14.0	2.3
GIT080	72.0	1.5	66	255	321	4.9	167,000	14.0	1.1
GIT119	109.0	0.6	103	253	356	4.7	164,000	14.0	1.1

Notes: These ratings were obtained with a heat source output rate and heat source flow rate shown in the table above. Other results shall be obtained under different conditions. Includes tank sensor for use with Lochinvar Heating Boiler.

Optional thermostat available for use with other boiler models.



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
f in y Lochinvar.com

