

SUBMITTAL SHEET

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	



LEAD-FREE FLARE X FNPT ADAPTER

T-4105NL

Designed and manufactured for underground water service installations only.

Available in NPT nominal sizes 3/4" through 2".

Working Pressure, Non Shock (PSI)

3/4" - 1" - 100 psi up to 100° F

1-1/4" - 2" - 80 psi up to 100° F




Pictured:
T-4105NL

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	Bronze	UNS C83600/C89836
2 Flare nut	Bronze	UNS C83600

DIMENSIONS

Size	A	B	C	D	Item No.
3/4"	0.64	2.48	1.52	0.93	313-024NL
1"	0.81	2.98	1.84	1.16	313-025NL
1-1/4"	0.88	3.55	2.39	1.50	313-026NL
1-1/2"	0.87	3.94	2.89	1.77	313-027NL
2"	1.18	5.01	3.54	2.18	313-028NL

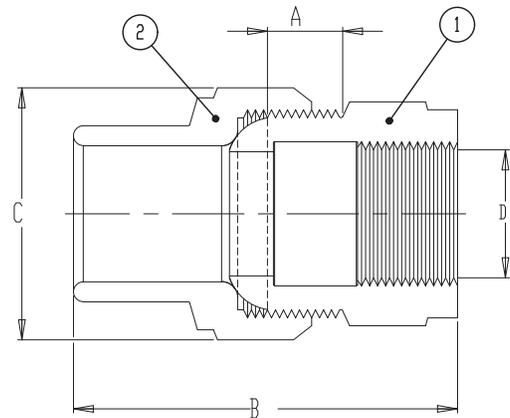

Pictured:
T-4105NL
Cut-away

Certifications/Listings:

Third-party certified.

ANSI/NSF 61: Drinking water system components health effects.

ANSI/NSF 372: Drinking water system components-lead content.

Standards:

AWWA C800: Underground service line valves and fittings.

ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch.