

## DESCRIPTION

- Chrome plated metal construction
- Brass or copper waterways
- 1/2" IPS shanks
- Supplied with vandal resistant screws

## OPERATION

- Lever style handles with hot and cold color indicators
- Hot side counterclockwise To open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

## FLOW

- Aerator is limited to 2.2 gpm max (8.3 L/min)

## CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel material


## STANDARDS

- Third party certified to CSA B125.1, ASME A112.18.1, NSF61/9, and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

## WARRANTY

- Warranted for 5 years against material or manufacturing defects

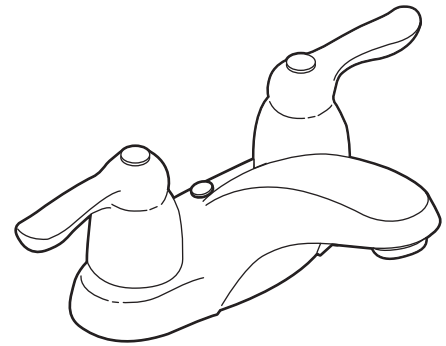

## Two-Handle Lavatory Faucet


### Less Waste

**Model: 8915**

### with Metal Waste Assembly

**Model: 8917**

**NOTE:** DESIGNED TO INSTALL THROUGH  
3-1" MIN. DIA. HOLES 2" ON CENTER

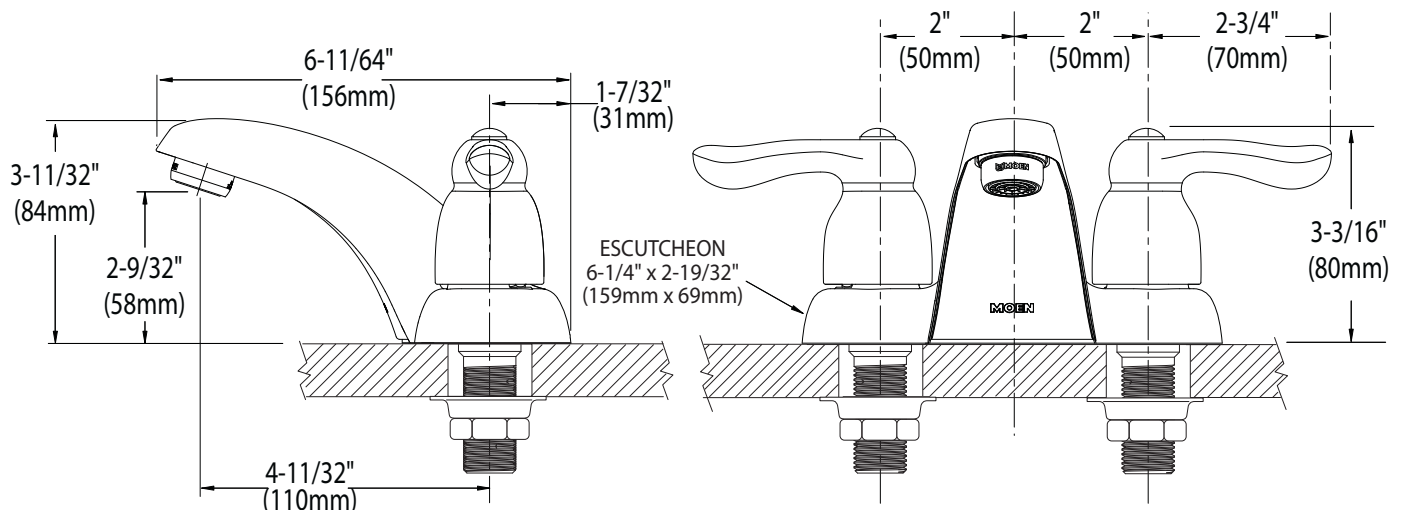

## CRITICAL DIMENSIONS

(DO NOT SCALE)