



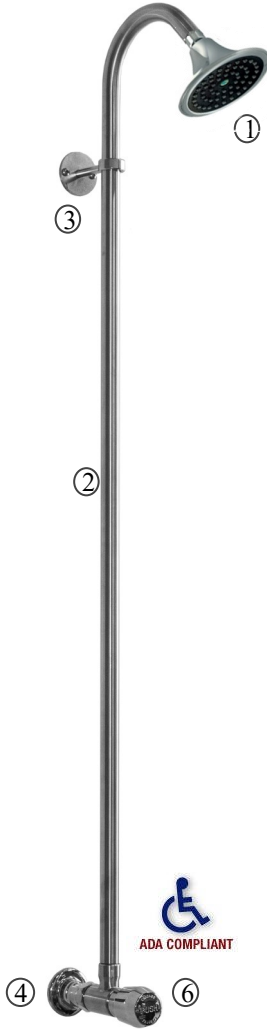

### WM-442-CHV

### WM-442-ADA

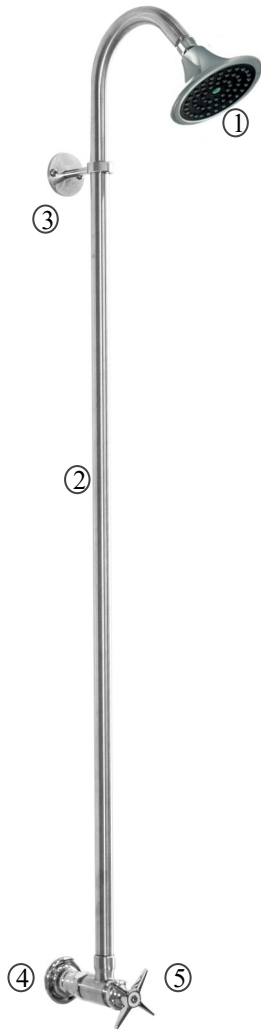

### WM-442 PARTS LIST

- |              |  |
|--------------|--|
| 1) SH-2517-4 | 4" Chrome Shower Head (1.75gpm)  |
| 2) SR-41-120 | 41" Stainless Steel Riser  |
| 3) WB-3      | 3" Stainless Steel Wall Bracket w/ 2 Stainless Steel Screws                        |
| 4) WJK-CP    | Straight Supply Arm with Flange  |
| 5) SSAV-CHV  | Cross Handle Stainless Steel Angle Valve (replacement valve for WM-442-CHV)        |
| 6) SSAV-ADA  | Metered Push Handle Stainless Steel Angle Valve (replacement valve for WM-442-ADA) |

**Accessories may vary due to availability and slight modifications by the manufacturer.**

**Additional options/accessories are available and shown on page 3.**

### Installation Guidelines

- Recommended Water Supply Line from flooring surface: 40-42"
- Recommended Shower Head Height: 77-79"


1. Bring ½" water supply line out of wall leaving 1" of exposed pipe threads.
2. Attach the WJK-CP Supply Arm to the water supply line.
3. Slide mounting bracket onto riser.
4. Attach shower riser to angle valve using Teflon tape on threads.
5. Connect angle valve to WJK-CP making sure provided washer is used.
6. Using a level or plumb line, mark placement holes for mounting bracket.
7. Pre-drill previously marked holes for placement of mounting bracket.
8. Secure mounting bracket to wall with stainless steel screws.
9. Tighten set screw on ring of mounting bracket.
10. Attach Shower Head to Riser. Teflon tape is not needed.




www.outdoorshowerco.com  
1-866-shower1 (746-9371)  
info@outdoorshowerco.com

**WM-442-ADA**  
**WM-442-CHV**


WM-442-CHV  
FRONT VIEW




WM-442-CHV  
SIDE VIEW

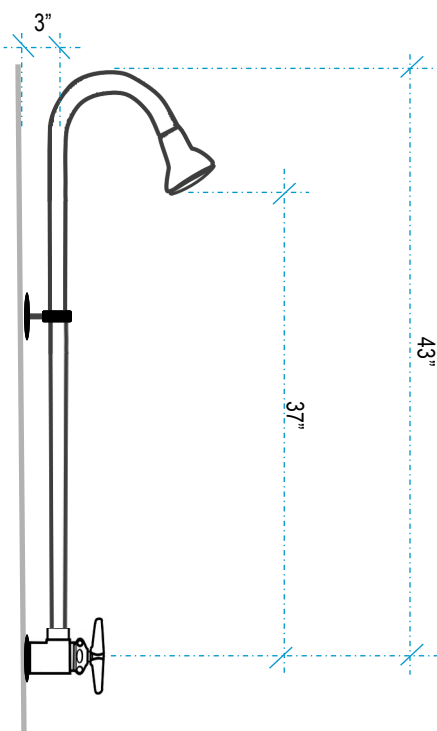

WM-442-ADA  
FRONT VIEW



WM-442-ADA  
SIDE VIEW

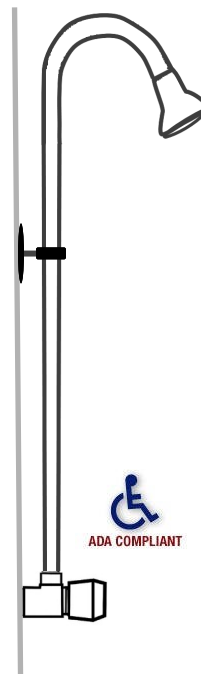


#### TECHNICAL DATA:

- WALL MOUNT UNIT
- STAINLESS STEEL ANGLE VALVE
- 1/2" x 41" 304 STAINLESS STEEL SCH 40 RISER
- 1.75 GPM CHROME PLATED SHOWER HEAD
- STAINLESS STEEL RING BRACKET
- STAINLESS STEEL SCREWS

# WM-442-ADA / WM-442-CHV ACCESSORIES & REPLACEMENT PARTS

## CROSS HANDLE ANGLE VALVE


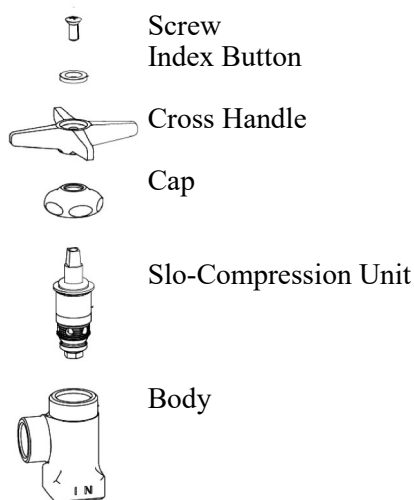


## ADA METERED ANGLE VALVE

### OPERATES FOR 5 TO 30 SECONDS VALVE CLOSES WITH WATER PRESSURE

Time is changed by rotating plastic-serrated adjustment nut with a pair of pliers. Raising nut (counter clockwise) shortens time, lowering nut (clockwise) lengthens time. Once cycle time is satisfactory, lock handle in place making sure set screw is securely fastened on groove in stem. Replace button.

Tighten the actuator assembly onto the body to approximately 20 ft. lbs., (Hand tighten and give the actuator assembly a 1/2 to 1 full turn with a wrench).

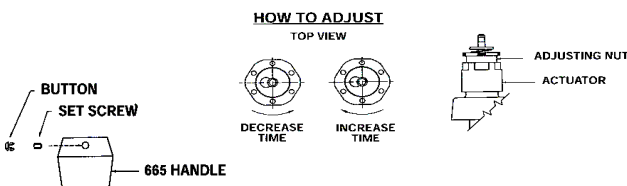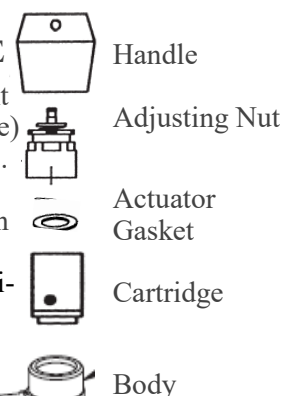

**NOTE:** Flush supply lines before installing valve to remove chips and dirt which can become lodged in the seat washer and cause the faucet to malfunction.


**FREEZE DAMAGE IS NOT COVERED BY WARRANTY.**

**WINTERIZING:** It is recommended that a shut-off valve be installed in the water line going to the pool shower connection where freezing temperatures can occur. Accessories can be removed and other parts partially disassembled for complete protection against freeze damage.


## ADDITIONAL OPTIONS & ACCESSORIES

### AVAILABLE WITH A FOOT SHOWER STAINLESS STEEL VALVES

#### WM-442-CHV-FS

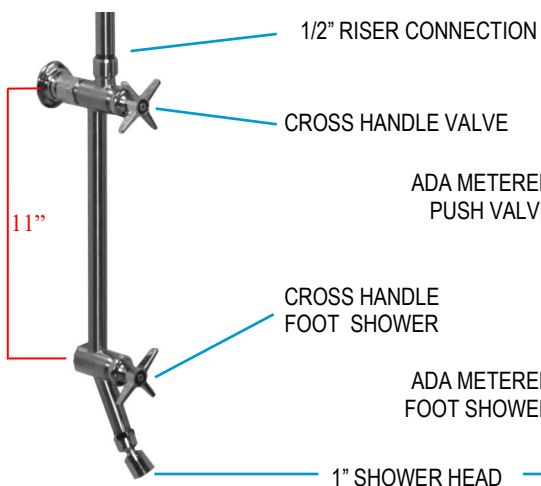


#### WM-442-ADA-FS

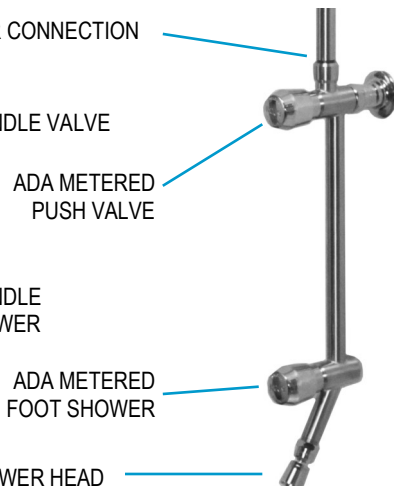

### PULL CHAIN VALVE PART #WM-442-PCV


- 8" Chrome Plated Brass Shower Head
- Chrome Plated Brass Self-closing Valve
- Stainless Steel Chain & Handle
- (2) 2" Wall Brackets
- Stainless Steel 1/2" Elbow
- 3" Stainless Steel Nipple
- 1/2" Stainless Steel Riser/Arm

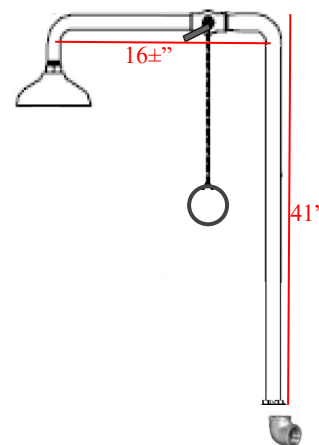

### AVAILABLE WITH HOSE BIBB

USE PART #WM-442-ADA-HB OR WM-442-CHV-HB

- STAINLESS STEEL VALVE BODY
- CHROME PLATED BRASS VACUUM BREAKER WITH 3/4" MHT

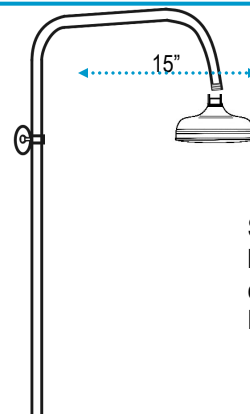

Shower Units with 6" or larger Shower Heads will come with 90° upgraded Riser.

Accessories may vary due to availability and slight modifications by the manufacturer.