



Baseboard Radiators



Runtal's Baseboard style is ideal for those desiring a low profile. As a retrofit, Runtal baseboard is a natural replacement for fin-tube or cast iron. In these cases, it is often easiest to use the existing pipe and simply order the appropriate length. Depending upon the heat output, or the desired design "look", Runtal will supply baseboard styles ranging from 1 to 4 tubes high.



With Fins*

| Model No. | VLX 7/7 | VLX 14/14 | VLX 21/21 | VLX 28/28 |
|-----------------|---------|-----------|-----------|-----------|
| Height | 2.8" | 5.8" | 8.6" | 11.5" |
| Depth | 2" | 2" | 2" | 2" |
| BTUH/ft. | | | | |
| Output @ 180°F: | 380 | 610 | 790 | 950 |



No Fins*

| Model No. | VX 7 | VX 14 | VX 21 | VX 28 |
|-----------------|------|-------|-------|-------|
| Height | 2.8" | 5.8" | 8.6" | 11.5" |
| Depth | 2" | 2" | 2" | 2" |
| BTUH/ft. | | | | |
| Output @ 180°F: | 160 | 290 | 430 | 570 |

Available in lengths from 20 to 354 inches (in 2" increments).
 *Runtal baseboards are offered with and without fins. When hung, visually they look similar. Finned units offer a higher convective component and as a result nearly double the output of comparable non-finned units.



In Stock Baseboard UF Series



Runtal offers 2, 3 and 4 panels high baseboards in white for immediate delivery in 2', 2.5', 3', 3.5', and from 4'-14' in even foot increments. All stock baseboards have multiple tappings (AB) that allow for all types of bottom and side piping connections (See piping configuration AB on page 13, Table 3). Stock baseboards may be special ordered in any of the other nine standard colors with a two-week delivery.



Wall Panels




Runtal's Wall Panel style radiators are ideal for placement under windows or on walls where floor space is at a premium. When placed under windows, wall panels help eliminate cold spots and drafts while allowing curtains to hang to the floor. Wall panel radiators are available in a variety of heights and widths to suit most any need.



| With Fins* | | | | | | |
|---------------------------------|------------------|------------------|-----------------|------------------|------------------|------------------|
| Model No. | VLX 35/35 | VLX 42/42 | VLX49/49 | VLX 56/56 | VLX 63/56 | VLX 70/56 |
| Height | 14.4" | 17.2" | 20.2" | 23.1" | 26.1" | 29.0" |
| Depth | 2" | 2" | 2" | 2" | 2" | 2" |
| BTUH/ft. Output @ 180°F: | 1260 | 1460 | 1650 | 1840 | 1950 | 2050 |
| No Fins* | | | | | | |
| Model No. | VX 35 | VX 42 | VX 49 | VX 56 | VX 63 | VX 70 |
| Height | 14.4" | 17.2" | 20.2" | 23.1" | 26.1" | 29.0" |
| Depth | 2" | 2" | 2" | 2" | 2" | 2" |
| BTUH/ft. Output @ 180°F: | 710 | 860 | 1010 | 1150 | 1300 | 1450 |

Available in lengths from 20 to 354 inches (in 2" increments).
 Additional heights (up to 24 tubes high or 69-3/4") available upon request.
 *Runtal wall panels are offered with and without fins. When hung, visually they look similar. Finned units offer a higher convective component and as a result nearly double the output of comparable non-finned units.

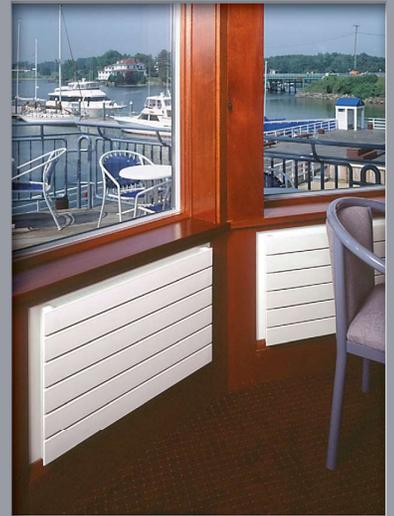

In Stock Wall Panels UF Series



Runtal offers 2 wall panels (6 and 8 panels) in 2', 3', 4' and 6' lengths in stock in white for immediate delivery. All stock wall panels have multiple tappings (AB) that allow for all types of bottom and side piping connections (See piping configuration AB on page 13, Table 3). Stock wall panels may be special ordered in any of the other nine standard colors with a two-week delivery.