KOHLER_®

Features

- Vitreous china.
- Elongated bowl.
- 1-1/2" top spud.
- 10" (254 mm) or 12" (305 mm) rough-in.
- 2-1/4" (57 mm) passageway.
- 11-3/8" (289 mm) x 10-3/8" (264 mm) water area.
- 1.6 gpf (6 lpf).
- 26" (660 mm) x 14-1/2" (368 mm) x 17-1/2" (445 mm).

Components

Additional included component/s: Spud, and Bolt cap accessory pack.



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 ICC/ANSI A117.1

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
| | 0 | White |


96 Biscuit



Highcliff[™] Elongated Toilet Bowl K-4368



Highcliff[™] Elongated Toilet Bowl K-4368

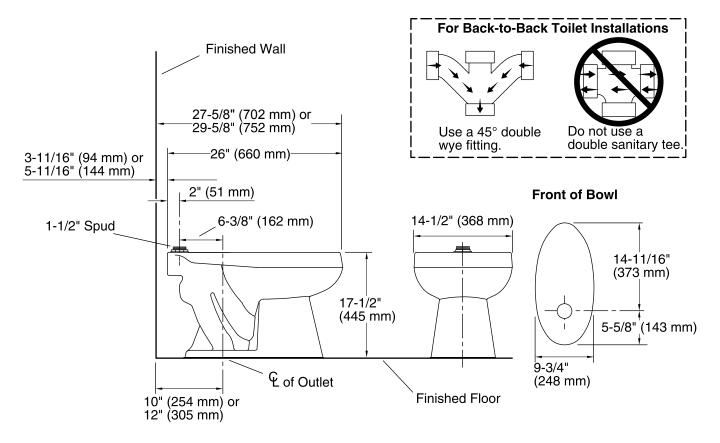

Technical Information

All product dimensions are nominal.

| Toilet type: | Flushometer, Floor-mount |
|-----------------------|-------------------------------------|
| Waste Outlet: | Floor |
| Bowl shape: | Elongated front |
| Spud size: | 1-1/2", Inlet, Top |
| Trap passageway: | 2-1/4" (57 mm) |
| Water surface size: | 11-3/8" x 10-3/8" (289 mm x 264 mm) |
| Rim to water surface: | 6" (152 mm) |
| Rough-in: | 12 |
| Seat-mounting holes: | 5-1/2" (140 mm) |
| | |

Fixture Supply Requirements

| Min static pressure: | 35 psi (241.3 kPa) |
|-----------------------|--------------------|
| Max static pressure: | 80 psi (551.6 kPa) |
| Min flowing pressure: | 25 psi (172.4 kPa) |
| Min flow rate: | 25 gpm (94.6 lpm) |

Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flushometer requirements: for 12"(305 mm) rough-in, sweat extension nipple is required. For back-to-back toilet installations: Use only a 45° double wye fitting.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

