


# FINIAL FUNDAMENTALS

## SHOWER FAUCET TRIM

# K-T313

ALSO K-T309, K-304, K-306-KS



## FEATURES

- Brass construction
- Variety of handle style options
- Intended for use with Rite-Temp or Hi Flow Rite-Temp valves

## CODES/STANDARDS APPLICABLE







Specified model meets or exceeds the following:

- ASME/ANSI A112.18.1M
- ASSE/ANSI 1016
- CSA B125
- IAPMO/UPC

## COLORS/FINISHES

- CP Polished Chrome
- Other Refer to Faucets Price Book for additional finishes

**SPECIFIED MODEL:** For complete faucet, both faucet trim and Rite-Temp valve must be specified.

Model	Description	 ADA	 ADA	 ADA
K-T313-3	Shower Only Trim With Cross Handle	<input type="checkbox"/> Other _____		
K-T313-4	Shower Only Trim With Lever Handle		<input type="checkbox"/> CP <input type="checkbox"/> Other _____	
K-T313-6	Shower Only Trim With Tee Handle			<input type="checkbox"/> CP <input type="checkbox"/> Other _____
K-T309-3	Valve Only Trim With Cross Handle	<input type="checkbox"/> Other _____		
K-T309-4	Valve Only Trim With Lever Handle		<input type="checkbox"/> CP <input type="checkbox"/> Other _____	
K-T309-6	Valve Only Trim With Tee Handle			<input type="checkbox"/> CP <input type="checkbox"/> Other _____
<b>Required Accessory</b>				
K-304-K	Rite-Temp Valve Without Stops	<input type="checkbox"/> NA		
K-304-KS	Rite-Temp Valve With Stops		<input type="checkbox"/> NA	
K-306-KS	HiFlow Rite-Temp Valve With Integral Stops			<input type="checkbox"/> NA
<b>Optional Accessory</b>				
88526	HiFlow Rite-Temp Thin Wall Installation Kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

## PRODUCT SPECIFICATION:

Rite-Temp pressure-balancing single-control shower faucet trim shall be of brass construction. Shower only trim shall include showerhead with arm, and faceplate with handle. Valve only trim shall include faceplate with handle. Faucet trim shall be Kohler Model K-T \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ and Rite-Temp valve shall be K-304- \_\_\_\_\_ -NA OR K-306-KS-NA HiFlow Rite-Temp valve..

# FINIAL FUNDAMENTALS

## PRODUCT INFORMATION



**WARNING: Risk of damage to the K-306-KS valve assembly.** When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).


## INSTALLATION NOTES

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8cm) to 18" (45.7cm) with single elbow between valve and wall-mount spout.

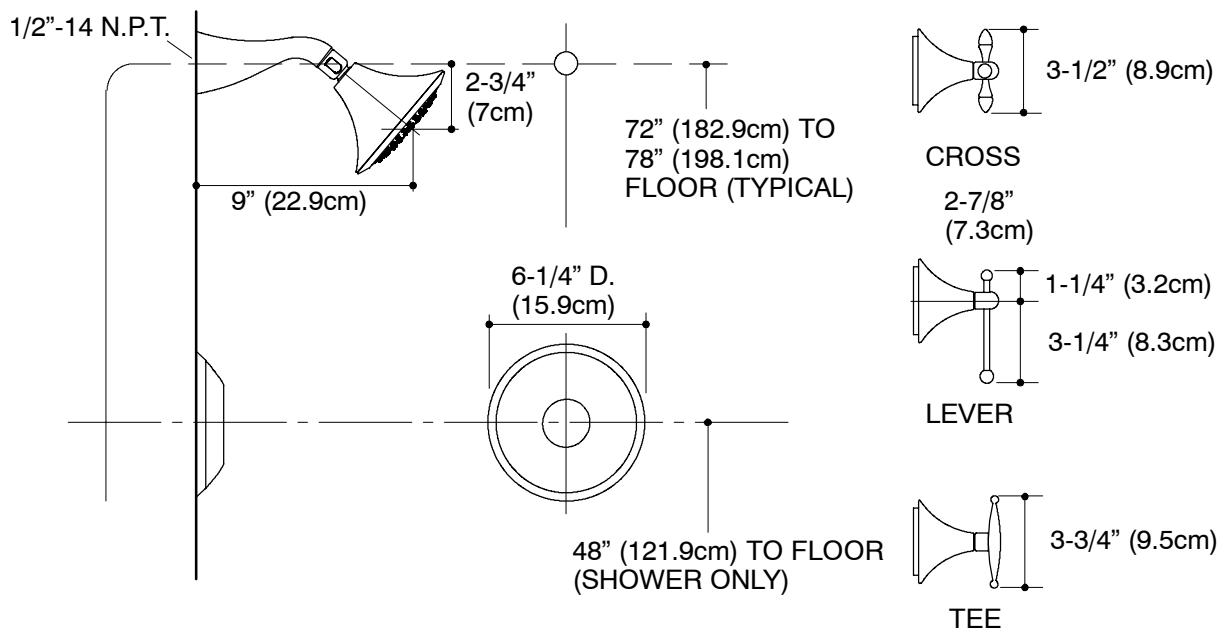

## PRODUCT DIAGRAM