

## Drake® Two-Piece Toilet, 1.28 GPF

### FEATURES

- TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Round front bowl, seat sold separately
- Universal Height
- Chrome plated trip lever
- 12" Rough-in, supply line sold separately
- ADA compliant for residential or hospitality use

### MODELS

- **CST775CEFG (#01, #03, #11, #12)**  
With CEFIONTECT ceramic glaze without seat
- **CST775CEF (#51)**  
Same as CST775CEFG without CEFIONTECT ceramic glaze
- **CST775CEFRG (#01)**  
Same as CST775CEFG with right hand trip lever

### COMPONENTS

- **C775CEFG**  
Round bowl with CEFIONTECT
- **C775CEF**  
Round bowl without CEFIONTECT
- **ST776EA**  
Tank and cover only
- **ST776ER**  
Tank and cover only with right-hand trip lever

### OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**  
Left Hand Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black
- **THU820#01-A**  
Right Hand Trip Lever - Cotton
- **ST776EB#01**  
Tank with Bolt-down Lid (#01 only)
- **ST776ED#01**  
Insulated Tank (#01 only)
- **ST776EDB#01**  
Insulated Tank with Bolt-down Lid (#01 only)
- **ST776ERB#01**  
Right Hand Trip Lever with Bolt-down Lid (#01)

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony (Without CEFIONTECT glaze)



**TORNADO FLUSH**



**UNIVERSAL HEIGHT**



**CEFIONTECT**

### PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, round front bowl and Chrome trip lever. Toilet shall be TOTO Model CST775CEF\_\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# CST775CEF(R)(G)

Drake® Two-Piece Toilet, 1.28 GPF


## SPECIFICATIONS

<b>Water Use</b>	1.28 GPF (4.8 LPF)
<b>Flush System</b>	TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	9" x 6-5/8"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	12"
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	<b>C775CEF(G)</b> 53 lbs. <b>ST776EA and ST776ER</b> 32 lbs.
<b>Shipping Dimensions</b>	<b>C775CEF(G)</b> 27-5/8" L x 15-1/2" W1 x 11-1/8" W2 x 18" H <b>ST776EA and ST776ER</b> 18-3/4" L x 8-7/8" W x 16-1/4" H

## INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

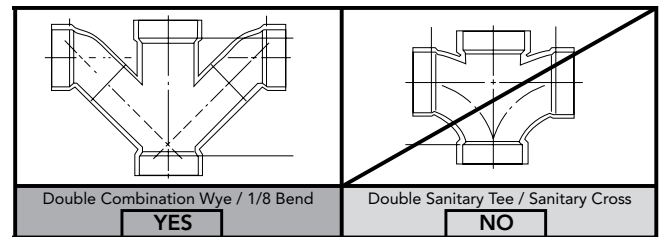

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

## DIMENSIONS

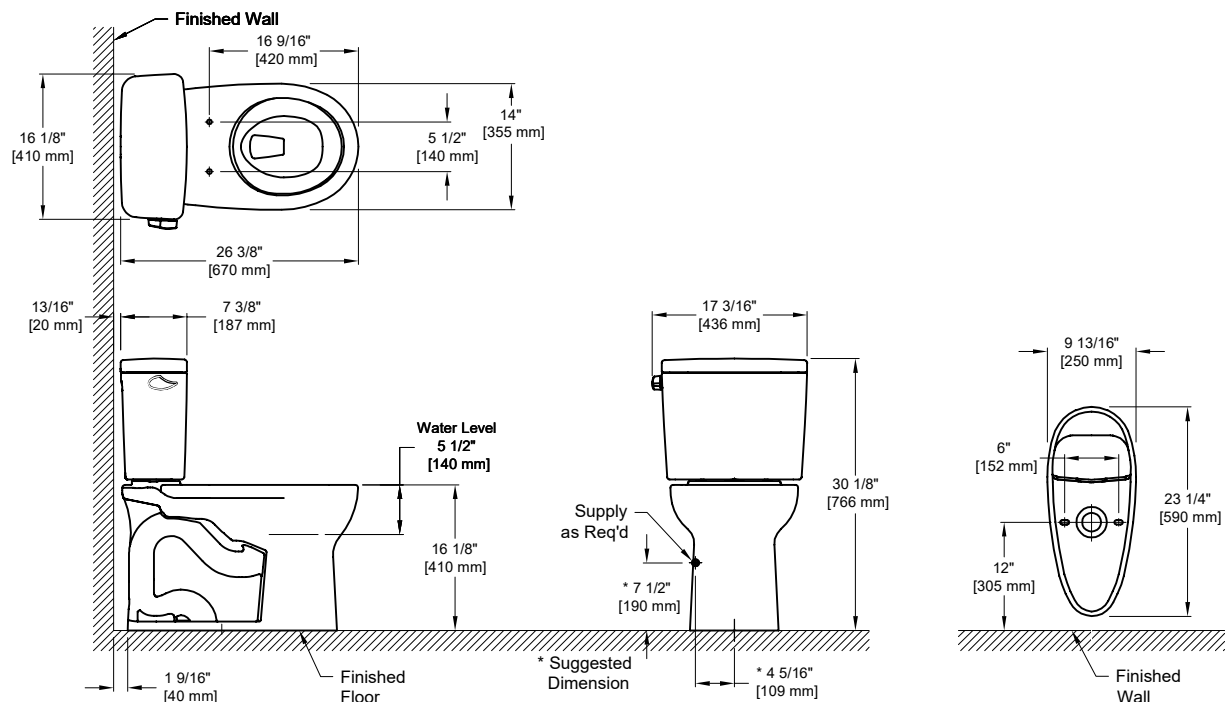

**TOTO®**

These dimensions and specifications are subject to change without notice