

Classic Showerhead 5 Mode

FEATURES

- WaterSense® certified high-efficiency
1.75 gpm (6.6 lpm)
- Easy to clean rubber nozzles reduce scale buildup
- G 1/2 thread connection compatible with 1/2 NPT
- Meets 2018 California water efficiency appliance
CEC regulations
- Shower arm sold separately

OPTIONAL COMPONENT

TS200N6: Shower Arm 6" (Sold separately)

COLORS/FINISHES

#CP Polished Chrome

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense,
State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada,
DoE, CEC and others
- Complies with CA Prop 65 warning requirements



Please note the following components
are sold separately



TS200N6: Shower Arm 6"

PRODUCT SPECIFICATION

Product shall be TOTO Model TBW03001U4#_____.
Product shall have a maximum flow rate of 1.75 gpm
(6.6 lpm). Product shall have rubber nozzles to prevent
limescale build-up. Product shall have G 1/2 thread
connection compatible with 1/2 NPT. Product shall
meet 2018 California water efficiency appliance CEC
regulations. Product shower arm sold separately.

TBW03001U4


Classic Showerhead 5 Mode

SPECIFICATIONS


Material	ABS & POM
Maximum Flow Rate	1.75 gpm (6.6 lpm)
Warranty	Limited Lifetime for Residential Use One Year for Commercial Use
Shipping Weight	1.0 lb
Shipping Dimensions	7-7/8" L x 5-3/4" W x 5" H

INSTALLATION NOTES

Compatible with TS200N6: Shower Arm 6"

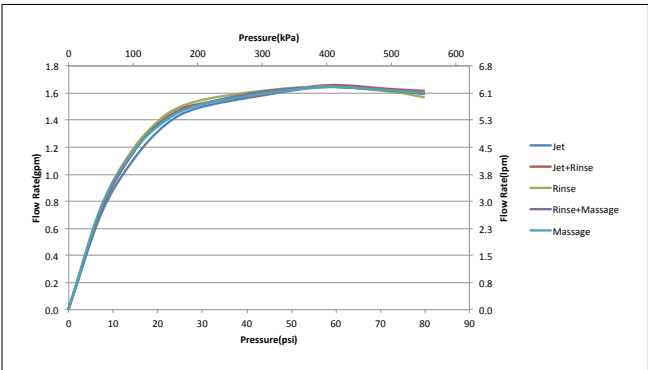

DIMENSIONS

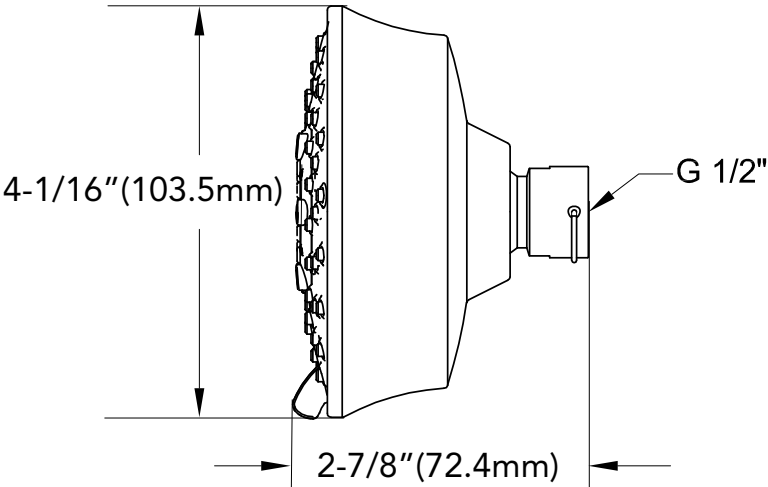

TOTO®