


**Z100****15 [381] DIAMETER MAIN DRAIN
LOW SILHOUETTE DOME**

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

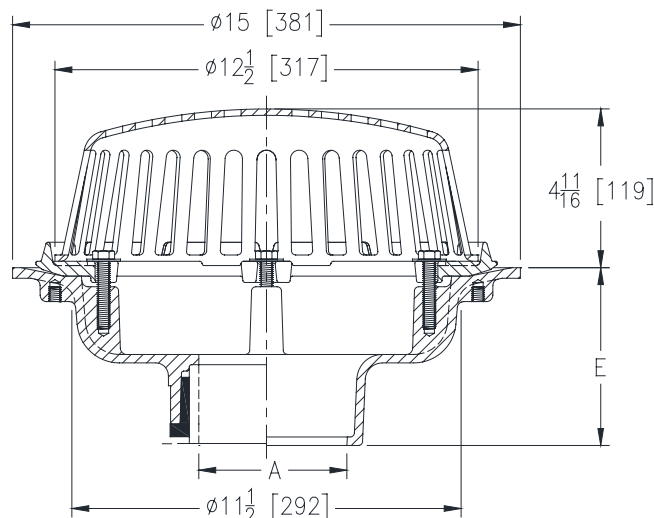

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2, 3, 4, [51, 76, 102]	26 [12]	103 [665]
5, 6 [127, 152]	27 [12]	
8 [203]	28 [13]	

ENGINEERING SPECIFICATION: ZURN Z100

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

3, 4, 5, 6, [76, 102, 127, 152]
2, 3, 4, 6, 8 [51, 76, 102, 152, 203]
2, 3, 4, 6, 8 [51, 76, 102, 152, 203]
2, 3, 4 [51, 76, 102]
6 [102]

(Specify size/type) **OUTLET**

___ IC Inside Caulk
___ IP Threaded
___ NH No-Hub
___ NL Neo-Loc
___ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-9/16 [116]
5-7/16 [112]

PREFIXES

___ Z D.C.C.I. Body with Poly-Dome*
___ ZA D.C.C.I. Body with Aluminum Dome

___ ZC D.C.C.I. Body with Cast Iron Dome
___ ZRB D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

___ -AC Angular Underdeck Clamp
___ -AR Acid Resistant Epoxy Coated
___ -AW 3/4 [19] to 4 [102] Adj. Water Level Regulator
(Specify Height) (ZC Only)
___ -C Underdeck Clamp
___ -DE Deck Extension
___ -DP Top-Set® Deck Plate (Replaces both the -C and -R)
___ -DR Top-Set® Drain Riser
___ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
___ -EA Adjustable Extension Assembly
2-1/8 [54] thru 3-1/2 [89]
___ -EB Top-Set® Adjustable Extension Assembly
___ -FG Flush Grate
___ -G Galvanized Cast Iron
___ -HD 6-3/4[171] High Aluminum Dome Strainer
(148 Sq. In. [955 cm²] Open Area) (ZA Only)

___ -R Roof Sump Receiver
___ -SC Secondary Clamp Collar
___ -SS Stainless Steel Mesh Screen Over Dome
___ -ST Dome with Solid Top (ZA & ZC Only)
___ -TC Neo-Loc Test Cap Gasket
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
___ -VP Vandal-Proof Secured Top
___ -W2 2 [51] Internal Water Dam
___ -W3 3 [76] Internal Water Dam
___ -W4 4 [102] Internal Water Dam
___ -84 Stainless Steel Perforated Gravel Guard
___ -85 Stainless Steel Perforated Extension
___ -89 2 [51] High External Water Dam
___ -90 90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. R
Date: 01/23/23
C.N. No. 144902
Patent zurn.com/patents
Prod. | Dwg. No. Z100