SYMMONS® Duro®

3690TRM
Shower Valve Trim
Specification Submittal

Location:

Model Numbers

☐ **3690TRM**
Shower Valve Trim

Valve Options:
-262 or 261 Series Temptrol® Shower Valve with TRM modifier
-162 or 161 Series Temptrol Shower Valve requires TC modifier

Feature Highlights

- Duro Shower Valve Trim.
- Requires Temptrol® Pressure-Balancing Shower Valve.
- Metal lever handle.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- Lever handle meets ADA requirements for operation

Options/Modifications

☐ **TC** Test Cap Trim (includes TA-10™ & T-12A) *used with 161/162 Series Temptrol Shower Valve*

☐ **L7** Less handle

☐ **BBZ** Brushed Bronze finish

☐ **MB** Matte Black finish

☐ **STN** Satin Nickel finish

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	TRM (required)	TC	Final SKU
3690	STN		TRM		3690STNTRM
3690	MB	L7	TRM	TC	3690MBL7TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Duro Shower Valve Trim _____ Includes Duro Shower Valve Trim for Temptrol® Pressure-Balancing Shower Valve. Features metal lever handle. Components shall be metal and nonmetal construction, and plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. Available options include: TC = Test Cap Trim, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

Sq. 7-1/2"
[191 mm]

3-1/2"
[89 mm]

3-1/8"
[79 mm]

3-1/2"
[89 mm]

Ref. 42"
[1067 mm]

Rough-In
2-3/8" ± 1/2",
[60 mm ± 13 mm]

FLOOR
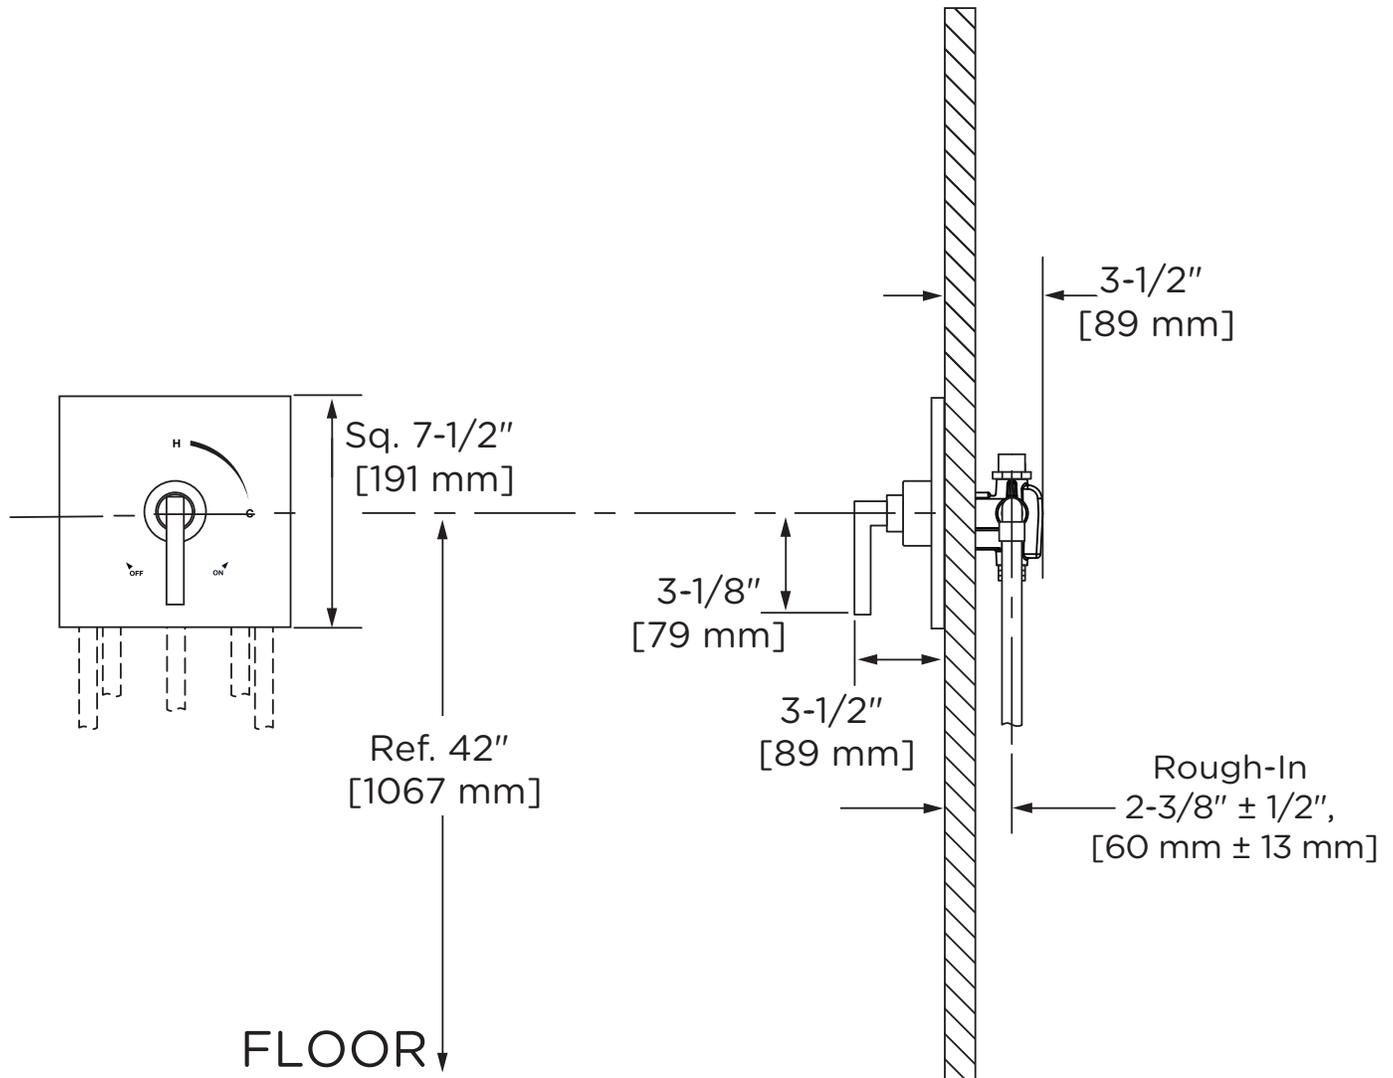
Notes:

1) Valve body and piping not included and shown as reference only.

2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.

3) All dimensions measured from nominal rough-in.

4) Dimensions subject to change without notice.