



# CST243EF(R)

## Entrada™ Close Coupled Toilet, 1.28GPF

### FEATURES

- E-Max flushing system, low consumption (1.28GPF/4.8LPF)
- Round bowl
- Universal Height
- Close coupled, elongated front bowl and tank set, less toilet seat
- Chrome trip lever
- 12" Rough-in

### MODELS

- CST243EF
- CST243EFR - Right-hand trip lever

### COMPONENTS

- C243EF - Round Front Bowl
- ST243E - Tank and Cover only
- ST243E(R) - Tank and Cover only, right-hand trip lever
- SS113 SoftClose® seat (sold separately)

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The two-piece, universal height, low consumption E-Max flushing system toilet shall be 1.28GPF. Toilet shall have high-profile tank, round bowl and chrome trip lever. Toilet shall be universal height. Toilet shall be TOTO Model CST243EF\_\_\_\_\_.



### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC)
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others

Shall be  
WaterSense  
Approved



# CST243EF(R)

## Entrada™ Close Coupled Toilet, 1.28GPF

### SPECIFICATIONS



- Water Use 1.28 GPF (4.8 LPF)
- Flush System E-Max
- Min. Water Pressure 8 psi (flowing)
- Water Surface 8-3/8" x 10-1/2"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C244EF - 50lbs  
ST243E(R) - 24lbs
- Shipping Dimensions C244EF - 26-1/2" x 16" W1 x 10-1/4" W2 x 17-3/4"

ST243E(R) - 16-1/2" x 8-1/4"  
x 15-3/4"

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

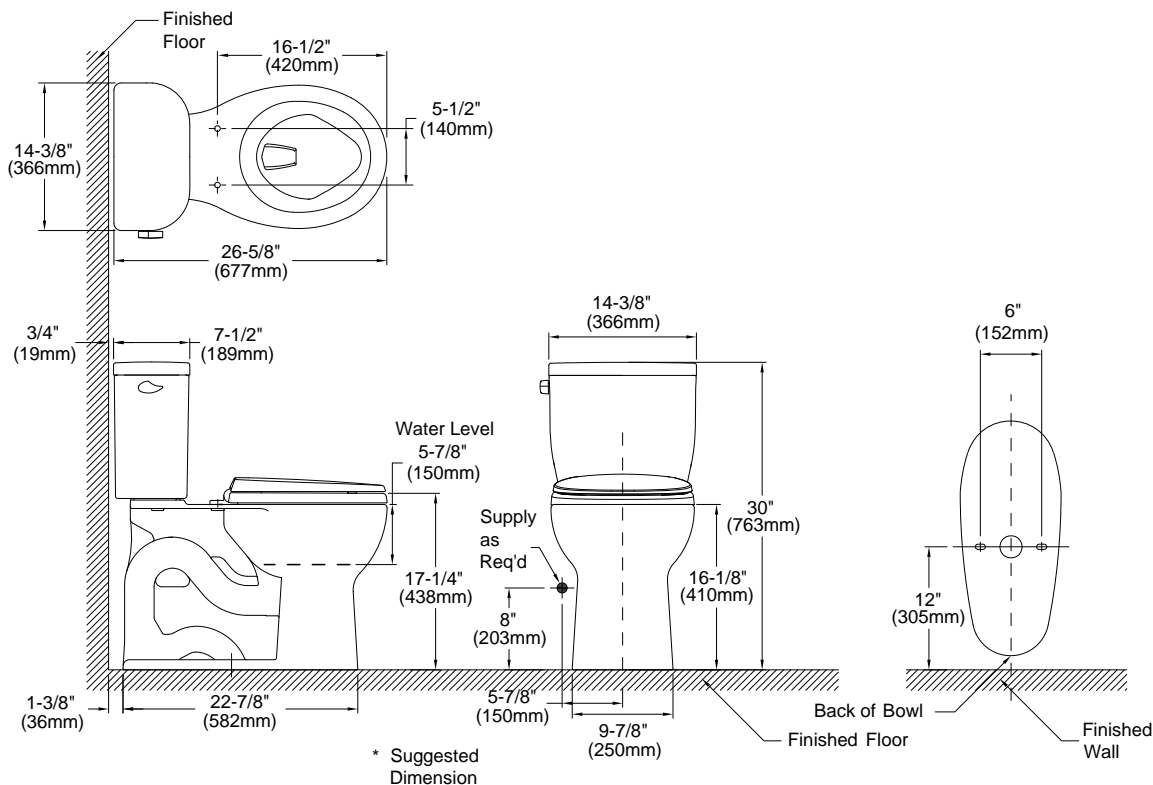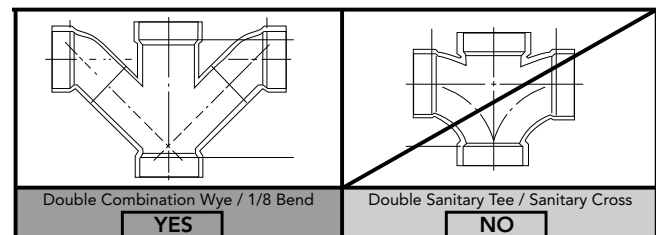

**TOTO**

These dimensions and specifications are subject to change without notice