

Entrada™ Close Coupled Toilet, 1.28GPF

FEATURES

- E-Max flushing system, low consumption (1.28GPF/4.8LPP)
- Elongated bowl
- Universal Height
- ADA compliant
- Close coupled, elongated front bowl and tank set, less toilet seat
- Chrome trip lever
- 12" Rough-in

MODELS

- CST244EF
- CST244EFR - Right-hand trip lever

COMPONENTS

- C244EF - Elongated Front Bowl
- ST243E - Tank and Cover only
- ST243E(R) - Tank and Cover only, right-hand trip lever
- SS114 SoftClose® seat (sold separately)

COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The two-piece, universal height, low consumption E-Max flushing system toilet shall be 1.28GPF. Toilet shall have high-profile tank, elongated bowl and chrome trip lever. Toilet shall be ADA compliant and universal height. Toilet shall be TOTO Model CST244EF_____.



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC)
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)



Shall be
WaterSense
Approved

CST244EF(R)

Entrada™ Close Coupled Toilet, 1.28GPF

SPECIFICATIONS



- Water Use 1.28 GPF (4.8 LPF)
- Flush System E-Max
- Min. Water Pressure 8 psi (flowing)
- Water Surface 8-3/8" x 10-1/2"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C244EF - 53lbs
ST243E(R) - 24lbs
- Shipping Dimensions C244EF - 28-1/2" x 16" W1
x 10-1/4" W2 x 17-3/4"

ST243E(R) - 16-1/2" x 8-1/4"
x 15-3/4"

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

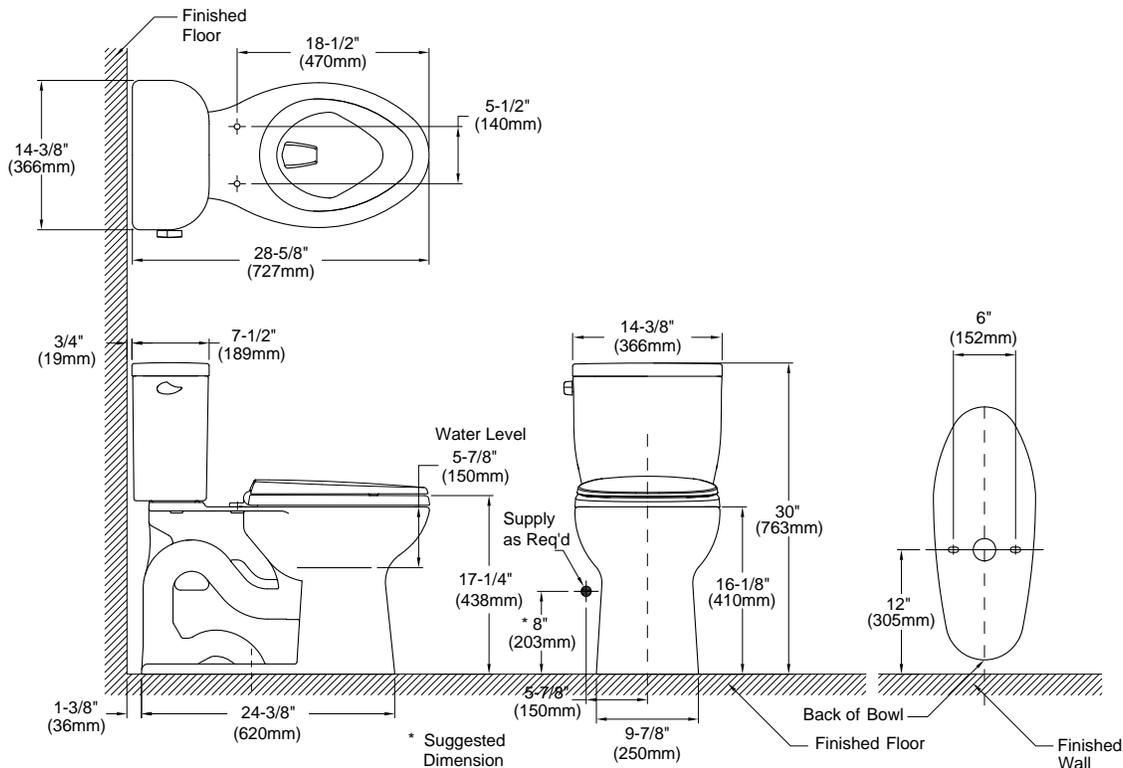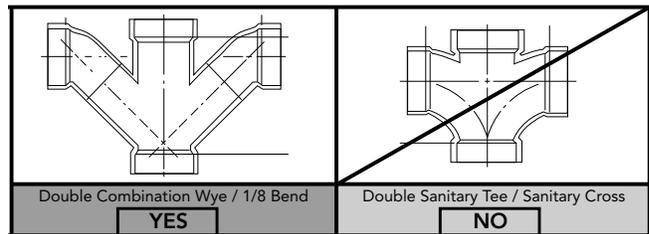

TOTO

These dimensions and specifications are subject to change without notice