

# TOTO®

# CST454CUF(R)(G)

## Drake® II 1G™ Close Coupled Toilet, 1.0GPF

### FEATURES

- Double Cyclone® flushing system, ultra-high efficiency (1.0GPF/3.8LPF)
- SanaGloss® ceramic glaze - SanaGloss glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- Decorative two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply

### MODELS

- CST454CUFG  
With SanaGloss ceramic glaze (#01, #03, #11, #12)
- CST454CUF  
Same as above less SanaGloss (#51 Only)
- CST454CUFRG  
With right-hand trip lever, SanaGloss ceramic glaze

### COMPONENTS

- C454CUFG Elongated bowl with SanaGloss
- ST453U Tank and cover only
- ST453UR Tank and cover only, right-hand trip lever
  
- SS224 SoftClose® seat (sold separately)
- SS214 SoftClose® seat (sold separately)
- SS204 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)
- SC534 Commercial seat (sold separately)

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony

### PRODUCT SPECIFICATION

The two-piece ultra-high-efficiency Double Cyclone flushing system toilet shall be 1.0GPF/3.8LPF. Toilet shall have SanaGloss ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl and Chrome trip lever. Toilet shall be TOTO Model CST454CUF\_\_\_\_\_.



**SanaGloss**

**CYCLONE®**  
FLUSHING SYSTEM BY TOTO

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- BAA Buy American Act Compliant
- ADA compliant (when installed with trip lever located on the approach side)



# CST454CUF(R)(G)

## Drake® II 1G™ Close Coupled Toilet, 1.0GPF



### SPECIFICATIONS

- Water Use 1.0 GPF/3.8LPF
- Flush System Double Cyclone
- Min. Water Pressure 8 psi (static)
- Water Surface 6-7/8" x 8-7/8"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C454CUF(G) 57.3lbs.  
ST453U(R) 28lbs.
- Shipping Dimensions C454CUF(G)  
29" L X 14-3/4" W1 X  
11-1/2" W2 X 16-1/4" H

ST453U(R)  
18" L X 9-1/2" W X 16-1/2" H

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

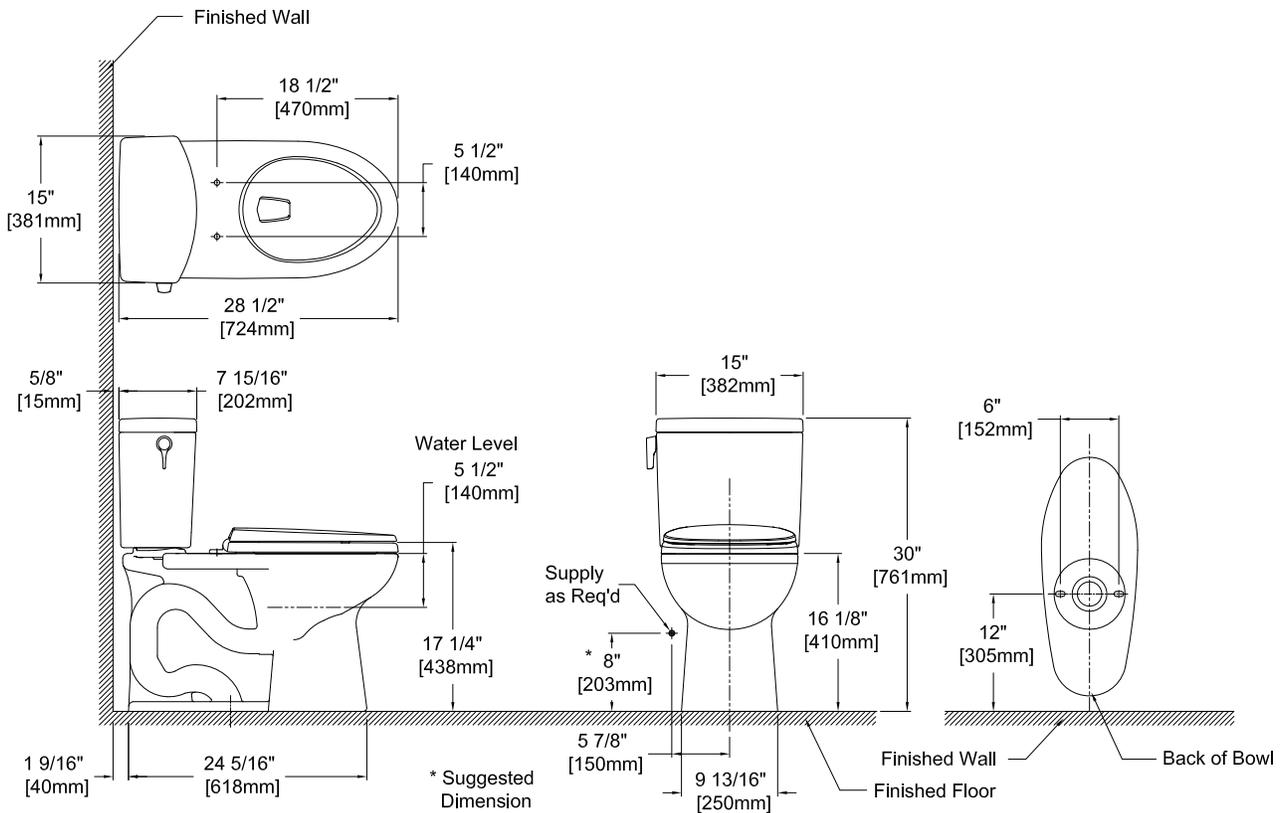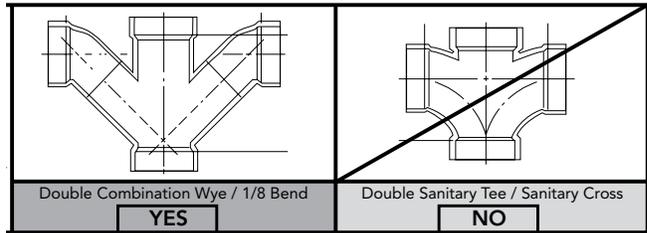

**TOTO**

These dimensions and specifications are subject to change without notice