

DESCRIPTION

- One piece, chrome plated, cast brass construction above-deck
- [Modern Style matches M-Power Soap dispenser \(model-8560\)](#)
- Single mount
- Vandal resistant aerator
- Flexible stainless steel supply lines
- Vandal resistant below-deck box with included mounting hardware

OPERATION

- "Touch free" operation for improved hygiene
- Adjustable sensor activation distance
- Vandal Mode: 30 second time-out feature
- Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Sentinel Flow: Eliminates stagnant water supply lines every 24 hours (factory setting = off)
- Metering Mode Feature: Adjustable run time from 10 to 180 seconds (factory setting = off)
- Battery 4(AA) with AC compatibility
- Battery level indicator with low battery warning light
- Battery life: Up to 10 years or 1,000,000 cycles*
- In-line filter included

FLOW

- 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Meets the current requirements of the Buy American Act (BAA)
- ADA ♿ for lever handles


WARRANTY


- Warranted for 5 years against material or manufacturer defects

Optional

Adjustable Temperature Thermostatic Mixing Valve
104451

- Minimum flow rate of .35gpm
- ASSE 1070 & CSA B-125.3 certified




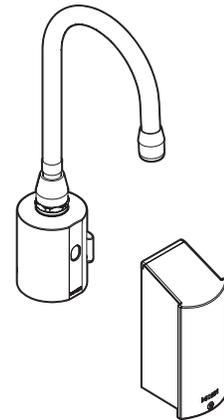

M•Power™
Mixing Gooseneck
Electronic Faucet

Models: 8562 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1" MIN. DIA.

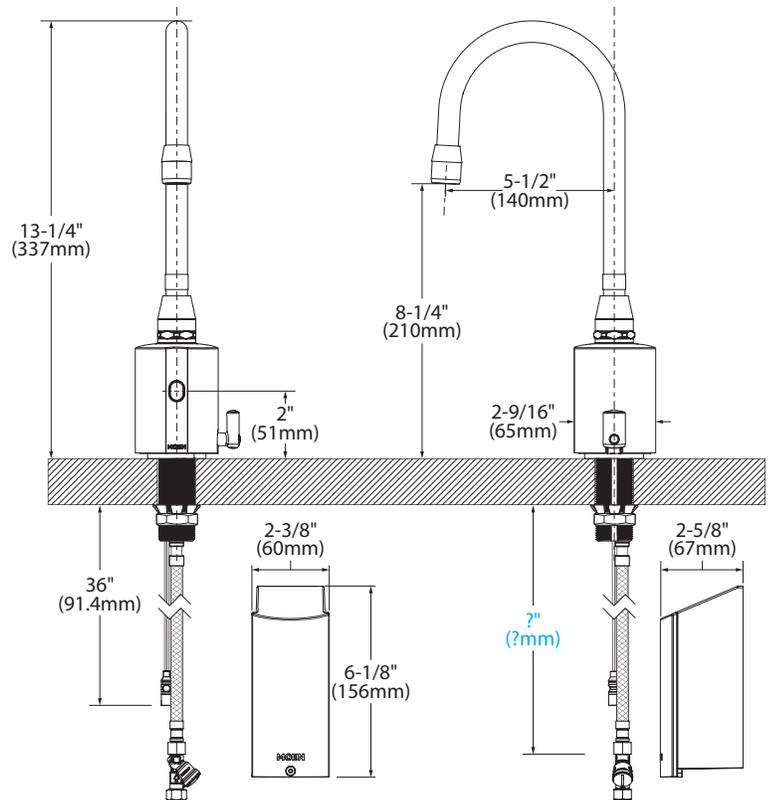

CRITICAL DIMENSIONS

(DO NOT SCALE)